

STN	Digitálne bezšnúrové telekomunikácie (DECT). Spoločné rozhranie (CI). Časť 4: Vrstva riadenia dátového spoja (DLC).	STN EN 300 175-4 V2.5.1 87 0175
------------	---	---

Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 4: Data Link Control (DLC) layer

Táto norma obsahuje anglickú verziu európskej normy.
This standard includes the English version of the European Standard.

Táto norma bola oznámená vo Vestníku ÚNMS SR č. 12/13

Obsahuje: EN 300 175-4 V2.5.1:2013

ETSI EN 300 175-4 V2.5.1 (2013-08)



**Digital Enhanced Cordless Telecommunications (DECT);
Common Interface (CI);
Part 4: Data Link Control (DLC) layer**

Reference

REN/DECT-000268-4

KeywordsDECT, DLC, IMT-2000, mobility, radio, TDD,
TDMA**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2013.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and
of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	12
Foreword.....	12
1 Scope	13
2 References	14
2.1 Normative references	14
2.2 Informative references.....	15
3 Definitions, symbols and abbreviations	15
3.1 Definitions.....	15
3.2 Symbols and abbreviations.....	15
4 Data Link Control (DLC) layer overview	18
4.1 General	18
4.2 C-plane services	19
4.3 U-plane services	20
4.4 Lower Layer Management Entity (LLME)	23
5 C-plane service characteristics	23
5.1 Data link service (LAPC+Lc).....	23
5.1.1 General.....	23
5.1.2 LAPC types of operation	24
5.1.3 Establishment of information transfer modes	24
5.1.3.1 Data Link Identifier (DLI)	24
5.1.3.2 LAPC states.....	24
5.2 Broadcast service (Lb).....	25
6 Frame structures for C-plane services	26
6.1 Data link service frame structure.....	26
6.1.1 General frame structure	26
6.1.2 Lc frame delimiting and transparency	27
6.1.3 Transmission order	27
6.1.4 Routing to logical channels.....	27
6.1.4.1 C _F /CL _F logical channel.....	27
6.1.4.2 C _S /CL _S logical channel.....	28
6.1.5 Invalid frames	28
6.2 Broadcast service frame structure.....	29
6.2.1 Standard frame structure	29
6.2.2 Extended frame structure	29
7 Elements of procedures and formats of fields for C-plane peer-to-peer communication.....	30
7.1 General	30
7.2 Address field formats	30
7.3 Address field parameters	30
7.3.1 REServed bit (RES)	30
7.3.2 Command Response (C/R) bit	30
7.3.3 SAPI field	30
7.3.4 New Link Flag (NLF) bit.....	31
7.3.5 LLN-field.....	31
7.3.6 Data Link Identifiers (DLI).....	31
7.4 Control field formats	32
7.5 Control field parameters	32
7.5.1 Poll/Final (P/F) bit	32
7.5.2 Multiple frame operation variables and sequence numbers	32
7.5.2.1 Modulus	32
7.5.2.2 Send state Variable V(S).....	32
7.5.2.3 Acknowledge state Variable V(A)	33
7.5.2.4 Send sequence Number N(S)	33

7.5.2.5	Receive state Variable V(R).....	33
7.5.2.6	Receive sequence Number N(R).....	33
7.5.3	Unacknowledged operation variables and sequence numbers.....	33
7.5.4	Supervisory and Unnumbered function bits S and U.....	33
7.6	Length indicator field format.....	33
7.7	Length indicator field parameters.....	34
7.7.1	Length indicator field extension bit (N).....	34
7.7.2	More data bit (M).....	34
7.7.3	Length parameter (L _I).....	34
7.7.4	Extended length parameter (L _{JJ}).....	35
7.7.5	Reserved bit (RES).....	35
7.8	Fill field format.....	35
7.9	Checksum field format.....	35
7.10	Checksum field parameters.....	35
7.11	Commands and responses.....	37
7.11.1	Information (I) command.....	37
7.11.2	Receive Ready (RR) command/response.....	37
7.11.3	Receive Not Ready (RNR) command/response.....	38
7.11.4	REJect (REJ) command/response.....	38
7.11.5	Set Asynchronous Balanced Mode (SABM) command.....	38
7.11.6	Disconnect Mode (DM) response.....	38
7.11.7	Unnumbered Information (UI) command.....	38
7.11.8	DISConnect (DISC) command.....	39
7.11.9	Unnumbered ACK (UA) response.....	39
8	Primitives.....	39
8.1	Primitive types.....	39
8.2	Primitives to the MAC layer (lower layer).....	39
8.3	Primitives to the NWK layer (higher layer).....	39
8.3.1	Parameter definitions.....	40
8.3.2	S-SAP primitives.....	41
8.3.2.1	DL_ESTABLISH primitive.....	41
8.3.2.2	DL_RELEASE primitive.....	41
8.3.2.3	DL_DATA primitive.....	42
8.3.2.4	DL_UNIT_DATA primitive.....	42
8.3.2.5	DL_SUSPEND primitive.....	42
8.3.2.6	DL_RESUME primitive.....	42
8.3.2.7	DL_ENC_KEY primitive.....	43
8.3.2.8	DL_ENCRYPT primitive.....	43
8.3.2.9	DL_SERVICE_MOD primitive.....	43
8.3.3	B-SAP primitives.....	43
8.3.3.1	DL_BROADCAST primitive.....	44
8.3.3.2	DL_EXPEDITED primitive.....	44
8.4	Primitives to the interworking unit.....	44
8.4.1	Parameter definitions.....	44
8.4.2	LU _X -SAP primitives.....	45
8.4.2.1	DL_U_DATA primitive.....	45
8.4.2.2	DL_U_UNIT_DATA primitive.....	45
8.4.2.3	DL_U_ERROR primitive.....	45
9	C-plane peer-to-peer procedures.....	46
9.1	General.....	46
9.2	Point to point acknowledged operation.....	46
9.2.1	Procedure for the use of the P/F bit.....	46
9.2.1.1	Class A acknowledged information transfer.....	46
9.2.1.2	Class B acknowledged information transfer.....	47
9.2.2	Use of LLN.....	47
9.2.2.1	Class A operation.....	47
9.2.2.2	Class B operation.....	47
9.2.3	Link establishment and information transfer in class A operation.....	47
9.2.3.1	Establishing class A operation.....	47
9.2.3.2	Class A acknowledged information transfer.....	48

9.2.3.3	Transmission of class A I-frames	48
9.2.3.4	Reception of class A I-frames	49
9.2.3.5	Receiving acknowledgements	49
9.2.3.6	Waiting for acknowledgement	49
9.2.3.7	Release of class A operation	50
9.2.3.8	Re-establishment of class A operation	50
9.2.4	Establishing class B multiple frame operation.....	50
9.2.4.1	Overview	50
9.2.4.2	Class B multiple frame establishment procedures.....	51
9.2.4.3	Class B LLN assignment procedures	52
9.2.4.3.1	PT establishment	52
9.2.4.3.2	FT establishment	53
9.2.5	Link maintenance and information transfer in class B multiple frame operation	53
9.2.5.1	Transmitting I-frames.....	53
9.2.5.2	Receiving I-frames	54
9.2.5.2.1	P bit set to 1	54
9.2.5.2.2	P bit set to 0.....	54
9.2.5.3	Sending and receiving acknowledgements.....	54
9.2.5.3.1	Sending acknowledgements	54
9.2.5.3.2	Receiving acknowledgements	54
9.2.5.4	Receiving REJ-frames.....	55
9.2.5.5	Receiving RNR-frames	56
9.2.5.6	LAPC own receiver busy condition	57
9.2.5.7	Waiting acknowledgement.....	57
9.2.5.8	Appropriate supervisory frame.....	58
9.2.6	Release of class B multiple frame operation.....	58
9.2.7	Link suspension and resumption.....	59
9.2.7.1	Link suspension.....	59
9.2.7.1.1	Class B acknowledged suspend	59
9.2.7.1.2	Unacknowledged suspend	60
9.2.7.2	Class B link resumption	61
9.2.7.3	Connection handover	62
9.2.7.3.1	Class A connection handover	63
9.2.7.3.2	Class B connection handover	64
9.2.7.3.3	Expiry of connection handover timer	64
9.2.8	Re-establishment of class B multi-frame operation	64
9.2.8.1	Criteria for re-establishment.....	64
9.2.8.2	Procedure	65
9.2.9	Exception handling	65
9.2.9.1	General	65
9.2.9.2	Class B exception condition reporting and recovery.....	66
9.2.9.2.1	N(S) sequence error	66
9.2.9.2.2	N(R) sequence error	66
9.2.9.2.3	Timer recovery condition	66
9.2.9.2.4	Collision of identical transmitted and received commands	66
9.3	Unacknowledged operation	67
9.3.1	Use of LLN for unacknowledged information transfer.....	67
9.3.2	Class U link establishment.....	67
9.3.3	Unacknowledged information transfer.....	67
9.3.3.1	Transmission of unacknowledged information	67
9.3.3.2	Reception of unacknowledged information	67
9.3.4	Unacknowledged release	67
9.4	Broadcast operation	67
9.4.1	Normal operation	67
9.4.1.1	Procedure in the Fixed radio Termination (FT)	67
9.4.1.2	Procedure in the Portable radio Termination (PT)	68
9.4.2	Expedited operation	68
9.4.2.1	Procedure in the Fixed radio Termination (FT)	68
9.4.2.2	Procedure in the Portable radio Termination (PT)	68
9.5	MAC layer interfaces	69
9.5.1	MC-SAP	69
9.5.1.1	C-plane overview	69

9.5.1.2	C-plane service data procedures.....	69
9.5.1.3	U-plane service data.....	70
9.5.2	MB-SAP.....	70
9.5.2.1	C-plane service data procedures.....	70
9.5.2.2	U-plane service data.....	70
9.5.3	MA-SAP.....	71
9.5.3.1	Overview.....	71
9.5.3.2	Service data procedures.....	71
10	Management procedures.....	71
10.1	Lower Layer Management Entity (LLME).....	71
10.2	MAC connection management.....	72
10.2.1	MAC connection set-up.....	72
10.2.2	MAC connection release.....	72
10.2.3	MAC connection modification.....	72
10.2.4	MAC connection identifiers.....	73
10.2.4.1	Overview.....	73
10.2.4.2	Advanced MAC Connection Identifiers (AMCI).....	73
10.2.4.3	Basic MAC Connection Identifiers (BMCI).....	74
10.2.4.4	MAC Connection Endpoint Identifier (MCEI).....	74
10.2.5	Selection of logical channel (C _S or C _F).....	74
10.3	DLC C-plane (LAPC) management.....	75
10.3.1	Provision of link signature.....	75
10.3.2	Routing of connection oriented links.....	75
10.3.3	Routing of connectionless links.....	76
10.4	DLC U-plane (LUX) management.....	76
10.4.1	U-plane establishment.....	76
10.4.2	U-plane release.....	76
10.4.3	U-plane suspend and resume.....	76
10.5	Connection handover management.....	77
10.6	Ciphering management.....	77
10.6.1	Ciphering management in cases where the NWK layer executes the ciphering related MM procedure.....	77
10.6.1.1	Providing a key to the MAC layer.....	77
10.6.1.2	Starting and stopping the ciphering.....	78
10.6.1.3	Connection handover.....	78
10.6.2	Ciphering management in cases where the NWK layer does not execute the ciphering related MM procedure.....	78
10.7	Broadband data link management.....	78
11	U-plane service characteristics.....	79
11.1	General.....	79
11.2	LU1 TRansparent UnProtected service (TRUP).....	79
11.3	LU2 Frame RELay service (FREL).....	80
11.3.1	General.....	80
11.3.2	Checksum operation.....	81
11.3.3	Segmentation and transmission class.....	81
11.3.4	Data transmission.....	82
11.3.4.1	Send side procedure.....	82
11.3.4.2	Receive side procedure.....	82
11.4	LU3 Frame SWItching service (FSWI).....	83
11.5	LU4 Forward Error Correction (FEC) service.....	83
11.6	LU5 Basic RATE adaption service (BRAT).....	84
11.6.1	Overview.....	84
11.6.2	Protected service operation.....	85
11.6.2.1	General.....	85
11.6.2.2	Data buffering and initial rate adaptation.....	85
11.6.2.3	Multi-channel set multiplexing.....	86
11.6.2.4	Segmentation of Multiplexed Data Units (MDU).....	87
11.6.2.5	Frame sequencing and addition of control and fill octets.....	88
11.6.2.6	Frame transmission.....	89
11.6.3	Unprotected service operation.....	90
11.6.3.1	General.....	90

11.6.3.2	Data buffering and initial rate adaption.....	90
11.6.3.3	Multi-channel set multiplexing	90
11.6.3.4	Segmentation of MDUs.....	92
11.6.3.5	Frame transmission	92
11.7	LU6 Secondary RATE adaption (SRAT) service	92
11.7.1	General.....	92
11.8	LU16 ESCape Service (ESC).....	93
11.8.1	General.....	93
11.9	LU7 64 kbit/s data bearer service	94
11.9.1	General.....	94
11.9.2	Physical layer service.....	94
11.9.3	MAC layer service	94
11.9.4	DLC layer service	94
11.9.4.1	Architectural model.....	94
11.9.4.1.1	Transmit (Tx) frame buffering	95
11.9.4.1.2	Receive (Rx) frame buffering	95
11.9.4.2	Automatic-Repeat-Request (ARQ) and Forward Error Control (FEC).....	95
11.9.4.2.1	Control field	96
11.9.4.2.2	Information field.....	98
11.9.4.2.3	ARQ checksum.....	99
11.9.4.3	Procedures for normal operation	99
11.9.4.3.1	Establishment and synchronization procedures	99
11.9.4.3.2	Active phase	101
11.9.4.3.3	Release.....	103
11.9.4.4	Exceptional procedures	103
11.9.4.4.1	Invalid frame condition	103
11.9.4.4.2	Establishment	103
11.9.4.4.3	Transmitting frames.....	103
11.9.4.4.4	Receiving frames	103
11.9.4.4.5	Sending acknowledgements	104
11.9.4.4.6	Forwarding of received data.....	104
11.9.4.4.7	N(R) sequence error	104
11.9.4.4.8	N(O) sequence error	104
11.9.4.4.9	N(S) sequence error	105
11.9.4.4.10	Format error.....	105
11.9.4.4.11	Abnormal release.....	105
11.9.4.4.12	Implicit reset.....	105
11.9.5	Network layer service	105
11.9.5.1	LCE service.....	105
11.9.5.2	CC service.....	105
11.10	LU8 service	106
11.10.1	Physical layer service.....	106
11.10.2	MAC layer service	106
11.10.3	DLC layer service	106
11.11	LU9 - Unprotected Rate Adaption for V series Equipment (RAVE) Service	106
11.11.1	Overview	106
11.11.1.1	FU9 frame structure	107
11.11.1.1.1	General frame structure	107
11.11.1.1.2	FU9 buffering procedures.....	107
11.11.1.1.3	Connection handover.....	107
11.11.1.1.4	Transmission order	108
11.11.2	Alignment signal management	108
11.11.2.1	General	108
11.11.2.2	Procedures.....	108
11.11.3	V.24 Signalling	109
11.11.3.1	General	109
11.11.3.2	Transmitter procedures.....	110
11.11.3.3	Receiver procedures	110
11.11.4	Rate Coding	110
11.11.4.1	General	110
11.11.4.2	Transmitter procedures.....	111
11.11.4.3	Receiver procedures	111

11.11.5	DECT Independent Clocking (DIC)	112
11.11.5.1	General	112
11.11.5.2	Measurement of phase differences	112
11.11.5.3	Compensation control rules	113
11.11.5.3.1	General	113
11.11.5.3.2	Optimizing error resilience	113
11.11.6	Information field	114
11.11.6.1	General	114
11.11.6.2	User data rates	114
11.11.6.3	Information field filling rule	114
11.11.7	Primitives	115
11.12	LU10 Enhanced Frame RELay (EFREL) service	116
11.12.1	General	116
11.12.2	Segmentation and transmission class	117
11.12.3	Data transmission	117
11.12.3.1	Send side procedures	117
11.12.3.1.1	"Early transmission" option	117
11.12.3.2	Receive side procedure	118
11.12.3.2.1	Standard SDU delivery mode	118
11.12.3.2.2	In-sequence SDU delivery mode	118
11.12.3.2.3	PDU-in-sequence delivery mode	119
11.12.3.2.4	PDU-as-received delivery mode	119
11.12.4	SDU boundaries definition	119
11.12.4.1	Infinite SDU mode	119
11.13	LU11 service	120
11.13.1	Physical layer service	120
11.13.2	MAC layer service	120
11.13.3	DLC layer service	120
11.14	LU12 UNprotected Framed service (UNF)	120
11.14.1	General	120
11.14.2	DLC layer service	120
11.14.2.1	Segmentation	121
11.14.2.2	Data transmission	122
11.14.2.2.1	Send side procedure	122
11.14.2.2.2	Receive side procedure	122
11.15	LU13 Enhanced Frame RELay service with CRC (EFREL-CRC)	123
11.15.1	General	123
11.15.2	SDU CRC generation	123
11.16	LU14 Enhanced Frame RELay service with CCM (EFREL-CCM)	124
11.16.1	General	124
11.16.2	LU14 SDU structure	124
11.16.2.1	SDU sizes	124
11.16.2.2	Security model	124
11.16.2.3	SDU processing	125
11.16.2.4	Limitations	125
11.16.2.5	CCM sequence numbers	125
11.16.2.6	CCM control procedures	126
12	Frame structures for U-plane services	126
12.1	General	126
12.2	FU1 frame structure	126
12.2.1	General frame structure	126
12.2.2	FU1 buffering procedures	128
12.2.3	Minimum delay (speech) operation	128
12.2.4	Connection handover	128
12.2.5	Transmission order	129
12.3	FU2 frame structure	129
12.3.1	General frame structure	129
12.3.2	FU2 buffering procedures	129
12.3.3	Connection handover	130
12.3.4	Transmission order	130
12.4	FU3 frame structure	130

12.4.1	General frame structure	130
12.4.2	FU3 buffering procedures	131
12.4.3	Connection handover	131
12.4.4	Transmission order	131
12.5	FU4 frame structure.....	131
12.5.1	General frame structure	131
12.5.2	FU4 buffering procedures.....	132
12.5.3	Connection handover.....	133
12.5.4	Transmission order	133
12.6	FU5 frame structure.....	133
12.6.1	General frame structure	133
12.6.2	FU5 buffering procedures.....	134
12.6.3	Connection handover	134
12.6.4	Transmission order	134
12.7	FU6 frame structure.....	134
12.7.1	General frame structure	134
12.7.2	FU6 buffering procedures.....	135
12.7.3	Connection handover	136
12.7.4	Transmission order	136
12.8	FU7 frame structure.....	136
12.9	FU8 frame structure.....	136
12.10	FU9 frame structure.....	136
12.11	FU10 frame structure.....	136
12.11.1	General frame structure	136
12.11.1.1	Specific for MAC service I_{PK}	139
12.11.2	Transmission of FU10c and FU10d frames	139
12.11.2.1	Insertion of the FU10c frame in an FU10a frame of the opposite link.....	139
12.11.2.2	Transmission of the FU10c frame using the G_F channel.....	140
12.11.2.3	Insertion of the FU10d frame in an FU10a frame of the opposite link	140
12.11.2.4	Transmission of the FU10d frame using the G_{FA} channel.....	140
12.11.3	FU10 buffering procedures	140
12.11.4	Connection handover	141
12.11.5	Transmission order	141
12.12	FU12 frame structure.....	141
12.12.1	General frame structure	141
12.12.2	FU12 buffering procedures	142
12.12.3	Connection handover	142
12.12.4	Transmission order	142
13	Elements of procedures and formats of fields for U-plane peer-to-peer communication	142
13.1	General	142
13.2	Address elements.....	143
13.2.1	Address field format	143
13.2.2	Address field parameters	143
13.3	Length indicator elements	143
13.3.1	Length indicator field format.....	143
13.3.1.1	Length indicator field format for all services except LU10	143
13.3.1.2	Length indicator field format for service LU10	144
13.3.2	Length indicator field parameters	144
13.3.2.1	Length indicator field parameters for all services except LU10.....	144
13.3.2.2	Length indicator field parameters for LU10 service	145
13.3.2.2.1	Meaning of the more (M) bit	147
13.4	Sequence number elements	148
13.4.1	Send sequence number format	148
13.4.2	Send sequence number parameters	148
13.4.3	Receive sequence number format	148
13.4.4	Receive sequence number parameters	149
13.5	Fill elements - Fill field format	149
14	U-plane peer-to-peer procedures	149
14.1	General	149
14.2	Frame transmission principles.....	150

14.2.1	Sequence numbering.....	150
14.2.2	Acknowledgements.....	150
14.2.2.1	Sending acknowledgements.....	150
14.2.2.2	Receiving acknowledgements.....	150
14.2.3	Transmission classes.....	150
14.2.3.1	Class 0: No LU _x retransmission or sequencing.....	151
14.2.3.2	Class 1: no LU _x retransmission.....	151
14.2.3.3	Class 2: variable throughput, limited delay LU _x retransmission.....	151
14.2.3.4	Class 3: fixed throughput LU _x retransmission.....	152
14.2.4	Operation parameter negotiation.....	152
14.3	Frame transmission procedures.....	152
14.3.1	General.....	152
14.3.2	Class 0 procedures.....	152
14.3.2.1	Sending side procedure.....	153
14.3.2.2	Receiving side procedure.....	153
14.3.3	Class 1 procedures.....	153
14.3.3.1	Sending side procedure.....	153
14.3.3.2	Receiving side procedure.....	154
14.3.4	Class 2 procedures.....	154
14.3.4.1	Sending side procedure.....	154
14.3.4.1.1	Synchronization message sending side procedure (LU10).....	155
14.3.4.1.2	Tx side end-of-activity rule.....	156
14.3.4.1.3	Abnormal SDU termination/abort signal (LU10 only).....	157
14.3.4.2	Receiving side procedure.....	157
14.3.4.2.1	Acknowledgement procedure.....	158
14.3.4.2.2	Rx side end-of-activity rule.....	158
14.3.4.2.3	Retransmission request procedure.....	159
14.3.4.2.4	SDU delivery procedure.....	159
14.3.4.2.5	Synchronization message receiver side procedure (LU10).....	159
14.3.4.2.6	Reception of an abnormal SDU termination/abort signal (LU10).....	160
14.3.5	Class 3 procedures.....	160
14.3.5.1	Sending side procedure.....	160
14.3.5.2	Receiving side procedure.....	161
Annex A (normative): System parameters.....		163
A.1	LAPC timer values.....	163
A.2	U-plane timer values.....	164
A.3	Constants.....	164
A.3.1	Retransmission counter (N250).....	164
A.3.2	Maximum number of CHO attempts (N251).....	164
Annex B (normative): Checksum algorithms.....		165
B.1	Arithmetic conventions.....	165
B.2	Coding algorithm.....	165
B.3	Decoding algorithm.....	165
B.4	Some examples.....	166
Annex C (informative): MAC connection states.....		167
Annex D (normative): Mapping of agreed channel rates to MCS sizes.....		168
D.1	Protected class operation.....	168
D.2	Unprotected class operation.....	169
Annex E (normative): LU12 applications.....		170
E.1	G.729.1 over 32 kb/s channel.....	170
E.1.1	G.729.1 payload format.....	170

E.1.1.1	G.729.1 payload header coding	170
E.1.2	Operations	172
E.1.2.1	Encoder bit rate.....	172
E.1.2.2	Protection against random errors	173
Annex F (informative):	Bibliography.....	174
Annex G (informative):	Change history	175
History		176

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (EN) has been produced by ETSI Technical Committee Digital Enhanced Cordless Telecommunications (DECT).

The present document is part 4 of a multi-part deliverable ([1] to [8]). Full details of the entire series can be found in part 1 [1].

Further details of the DECT system may be found in TR 101 178 [i.1] and ETR 043 [i.2].

National transposition dates	
Date of adoption of this EN:	20 August 2013
Date of latest announcement of this EN (doa):	30 November 2013
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 May 2014
Date of withdrawal of any conflicting National Standard (dow):	31 May 2014

1 Scope

The present document is one of the parts of the specification of the Digital Enhanced Cordless Telecommunications (DECT) Common Interface (CI).

The present document specifies the Data Link Control (DLC) layer. The DLC layer is part 4 of the DECT CI standard and layer 2b of the DECT protocol stack.

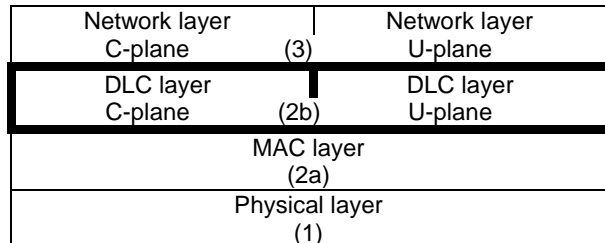


Figure 1.1

Two planes of operation are specified for this DLC (sub)layer. These planes are called the Control plane (C-plane) and the User plane (U-plane).

The C-plane is mostly concerned with the DECT signalling aspects. It provides a reliable point-to-point service that uses a link access protocol to offer error protected transmission of Network (NWK) layer messages. The C-plane also provides a separate point-to-multipoint (broadcast) service (Lb).

The U-plane is only concerned with end-to-end user information. This plane contains most of the application dependent procedures of DECT. Several alternative services (both circuit-mode and packet-mode) are defined as a family of independent entities. Each service provides one or more point-to-point U-plane data links, where the detailed characteristics of those links are determined by the particular needs of each service. The defined services cover a wide range of performance, from "unprotected with low delay" for speech applications to "highly protected with variable delay", for local area network applications.

NOTE: The performance of the DLC services need not be tight to any particular application. For example the "unprotected with low delay" service could also be used for data applications, e.g. if some data protection is provided outside the DECT protocol.

The present document uses the layered model principles and terminology as described in Recommendation ITU-T X.200 [14] and X.210 [15].

The present document includes New Generation DECT, a further development of the DECT standard introducing wideband speech, improved data services, new slot types and other technical enhancements.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 300 175-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 1: Overview".
- [2] ETSI EN 300 175-2: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 2: Physical Layer (PHL)".
- [3] ETSI EN 300 175-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 3: Medium Access Control (MAC) layer".
- [4] Void.
- [5] ETSI EN 300 175-5: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 5: Network (NWK) layer".
- [6] ETSI EN 300 175-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 6: Identities and addressing".
- [7] ETSI EN 300 175-7: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 7: Security features".
- [8] ETSI EN 300 175-8: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 8: Speech and audio coding and transmission".
- [9] ETSI TS 144 006: "Digital cellular telecommunications system (Phase 2+); Mobile Station - Base Stations System (MS - BSS) interface Data Link (DL) layer specification (3GPP TS 44.006)".
- [10] Recommendation ITU-T Q.920: "ISDN user-network interface data link layer - General aspects".
- [11] Recommendation ITU-T Q.921: "ISDN user-network interface - Data link layer specification".
- [12] Recommendation ITU-T V.42: "Error-correcting procedures for DCEs using asynchronous-to-synchronous conversion".
- [13] Recommendation ITU-T V.110: "Support by an ISDN of data terminal equipments with V-Series type interfaces".
- [14] Recommendation ITU-T X.200: "Information technology - Open Systems Interconnection - Basic Reference Model: The basic model".
- [15] Recommendation ITU-T X.210: "Information technology - Open Systems Interconnection - Basic Reference Model: Conventions for the definition of OSI services".
- [16] ISO/IEC 8073: "Information technology - Open Systems Interconnection - Protocol for providing the connection-mode transport service".
- [17] ETSI EN 301 649: "Digital Enhanced Cordless Telecommunications (DECT); DECT Packet Radio Service (DPRS)".

- [18] FIPS Publication 197 (2001): "Advanced Encryption Standard (AES)", National Institute of Standards and Technology (NIST).
- [19] IETF RFC 3610: "Counter with CBC-MAC (CCM)".

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI TR 101 178: "Digital Enhanced Cordless Telecommunications (DECT); A High Level Guide to the DECT Standardization".
- [i.2] ETSI ETR 043: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Services and facilities requirements specification".
- [i.3] Recommendation ITU-T I.122: "Framework for frame mode bearer services".
- [i.4] Recommendation ITU-T V.24: "List of definitions for interchange circuits between Data Terminal Equipment (DTE) and data circuit-terminating equipment (DCE)".
- [i.5] IETF RFC 4749: "RTP Payload Format for the G.729.1 Audio Codec".

koniec náhľadu – text ďalej pokračuje v platenej verzii STN