STN	Rozvod družicového signálu jedným koaxiálnym káblom. Druhá generácia.	STN EN 50607
		36 7225

Satellite signal distribution over a single coaxial cable - Second generation

Táto norma obsahuje anglickú verziu európskej normy. This standard includes the English version of the European Standard.

Táto norma bola oznámená vo Vestníku ÚNMS SR č. 06/15

Obsahuje: EN 50607:2015

120880

STN EN 50607: 2015

EUROPEAN STANDARD NORME EUROPÉENNE EUROPÄISCHE NORM

EN 50607

January 2015

ICS 33.060.40

Supersedes CLC/TS 50607:2013

English Version

Satellite signal distribution over a single coaxial cable - Second generation

Distribution de signaux par satellite sur un seul câble coaxial - Deuxième génération

Verteilen von Satellitensignalen über ein Koaxialkabel ¿ Zweite Generation

This European Standard was approved by CENELEC on 2014-10-20. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization Comité Européen de Normalisation Electrotechnique Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents		Page
Forew	ord	3
Introdu	uction	4
1	Scope	5
2	Normative references	5
3	Terms, definitions and abbreviations	
3.1	Terms and definitions	
3.2	Abbreviations	8
3.3	Used commands	8
4	System architecture	9
5	SCIF control signals	12
5.1	DC levels	12
5.2	Method of the data bit signalling	14
6	Structure and format of the messages of the 2nd generation single cable distribution system (S	CD2)14
6.1	Backwards Compatibility to EN 50494	14
6.2	Non-DiSEqC structure	14
6.3	Uni-directional operation	15
6.4	Bi-directional operation	15
7	SCD2 commands	15
7.1	ODU_Channel_change	15
7.1.1	Formats	15
7.1.2	"Special" frequencies	16
7.2	ODU_Channel_change_PIN	16
7.3	ODU_UB_avail	17
7.4	ODU_UB_PIN	18
7.5	ODU_UB_inuse	18
7.6	ODU_UB_freq	
7.7	ODU_UB_switches	20
8	Conventions	21
8.1	UB slots numbering	
8.2	Numbering of satellite IF banks	22
9	Traffic collision management rules	
9.1	General	
9.2	Automatic detection of SCIF control signal failure	
9.3	Pseudo-random repeat	
9.3.1	Handling of SCIF control signal	
9.3.2	Random delay generation law	
	A (normative) Implementation rules	
A.1	User interface	
A.2	Installation impedance	
A.3	Signal reflection and return loss in installations	
A.4	Power supply of the SCIF	
A.5	Remarks concerning power supply	
Bibliog	graphy	28

Foreword

This document (EN 50607:2015) has been prepared by CLC/TC 209 "Cable networks for television signals, sound signals and interactive services".

The following dates are fixed:

•	latest date by which this document has	(dop)	2015-10-20
	to be implemented at national level by		
	publication of an identical national		
	standard or by endorsement		
•	latest date by which the national	(dow)	2017-10-20
	standards conflicting with this		
	document have to be withdrawn		

This document supersedes CLC/TS 50607:2013.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Introduction

In EN 61319-1:1996, the interfaces for the control and command of the devices associated with the satellite receivers are described in the following clauses:

- Clause 4: Interfaces requirements for polarizer and polar switchers;
- Clause 5: Interfaces requirements for low-noise block converters (LNB).

In these clauses, analogue techniques are described for controlling the LNB and polar switchers.

In the DiSEqCTM Bus Functional Specification, the "Digital Satellite Equipment Control Bus" (called DiSEqC) is introduced as a single method of communication between the satellite and the peripheral equipment, using only the existing coaxial cables. The existing EN 50494 "Satellite signal distribution over a single coaxial cable in single dwelling installations" describes a system for distributing signals via single coaxial cable issued from different bands and polarisations to several satellite receivers This specification is limited to 8 units per output of the Single Cable Interface and to 8 Satellite IF banks (bands, feeds, polarisations).

The second generation described in this standard is intended for single and multiple dwelling installations and includes the following enhancements compared to EN 50494:

- The number of demodulators is extended to a maximum of 32 units per output of the Single Cable Interface (hereafter referred to as SCIF) device.
- The system is scaled for a maximum number of 256 Satellite IF banks (bands, feeds, polarisations)
- The SCIF replies, which may be used during installation process, are also based on DiSEqC.
- Equipment according to this standard is downwards compatible to the specifications provided by EN 50494.

- 5 - EN 50607:2015

1 Scope

This European Standard describes:

- the system physical structure;
- the system control signals, which implement a set of messages using DiSEqC physical layer but not the DiSEqC message structure;
- the definition of identified configurations;
- the management of the potential collisions in the control signals traffic.

Figure 1 illustrates the physical system configuration considered in this standard.

Several satellite signal demodulators can receive signals from any of the input signal banks (Bank 1, Bank 2, Bank M, with $M \le 256$) of the LNB or the switch. The signals selected by the demodulators (or receivers) are transported via a single cable to these demodulators (Receiver 1, Receiver 2, Receiver N, with $N \le 32$).

To achieve these single cable distributions, the Single Cable Interface (SCIF, likely embedded in a LNB or a Switch) features some specific functions and characteristics.

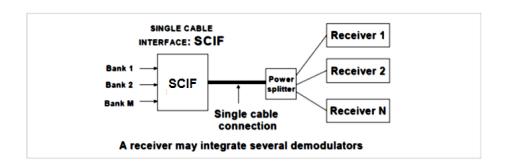


Figure 1 — General architecture of the single cable distribution

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 50494, Satellite signal distribution over a single coaxial cable in single dwelling installations

EN 60728-1, Cable networks for television signals, sound signals and interactive services – Part 1: System performance of forward paths (IEC 60728-1)

EN 60728-4, Cable networks for television signals, sound signals and interactive services – Part 4: Passive wideband equipment for coaxial cable networks (IEC 60728-4)

EN 61319-1:1996, Interconnections of satellite receiving equipment – Part 1: Europe (IEC 61319-1:1995)

IEC 60050-371, International Electrotechnical Vocabulary - Chapter 371: Telecontrol

IEC 60050-721, International Electrotechnical Vocabulary - Chapter 721: Telegraphy, facsimile and data communication

DiSEqC[™] Bus Functional Specification, Version 4.2, February 25, 1998¹

koniec náhľadu – text ďalej pokračuje v platenej verzii STN

¹ Available from http://www.eutelsat.com/satellites/4_5_5.html