

<b>STN</b>	<b>Vysokonapäťové spínacie a riadiace zariadenia. Časť 202: Blokové transformovne vysokého/nízkeho napätia. Oprava AC2</b>	<b>STN EN 62271-202/AC2</b>
		35 4220

Táto norma obsahuje anglickú verziu európskej normy.  
This standard includes the English version of the European Standard.

Táto norma bola označená vo Vestníku ÚNMS SR č. 09/16

Text opravy je v dokumente IEC.

Obsahuje: EN 62271-202:2014/AC Apr.:2015, IEC 62271-202:2014/COR1:2015

**123484**

---

Úrad pre normalizáciu, metrológiu a skúšobníctvo SR, 2016  
Podľa zákona č. 264/1999 Z. z. v znení neskorších predpisov sa môžu slovenské technické normy  
rozmnožovať a rozširovať iba so súhlasom Úradu pre normalizáciu, metrológiu a skúšobníctvo SR.

INTERNATIONAL ELECTROTECHNICAL COMMISSION  
COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

---

**IEC 62271-202**  
Edition 2.0 2014-03

High-voltage switchgear and controlgear –  
Part 202: High-voltage/low-voltage prefabricated  
substation

**IEC 62271-202**  
Édition 2.0 2014-03

Appareillage à haute tension –  
Partie 202: Postes préfabriqués haute  
tension/basse tension


**C O R R I G E N D U M 1**

Corrections to the French version appear after the English text.

Les corrections à la version française sont données après le texte anglais.

**Figure AA.6 – Selection of tests on high voltage interconnections for class IAC-A**

*Replace the existing figure by the following new figure:*

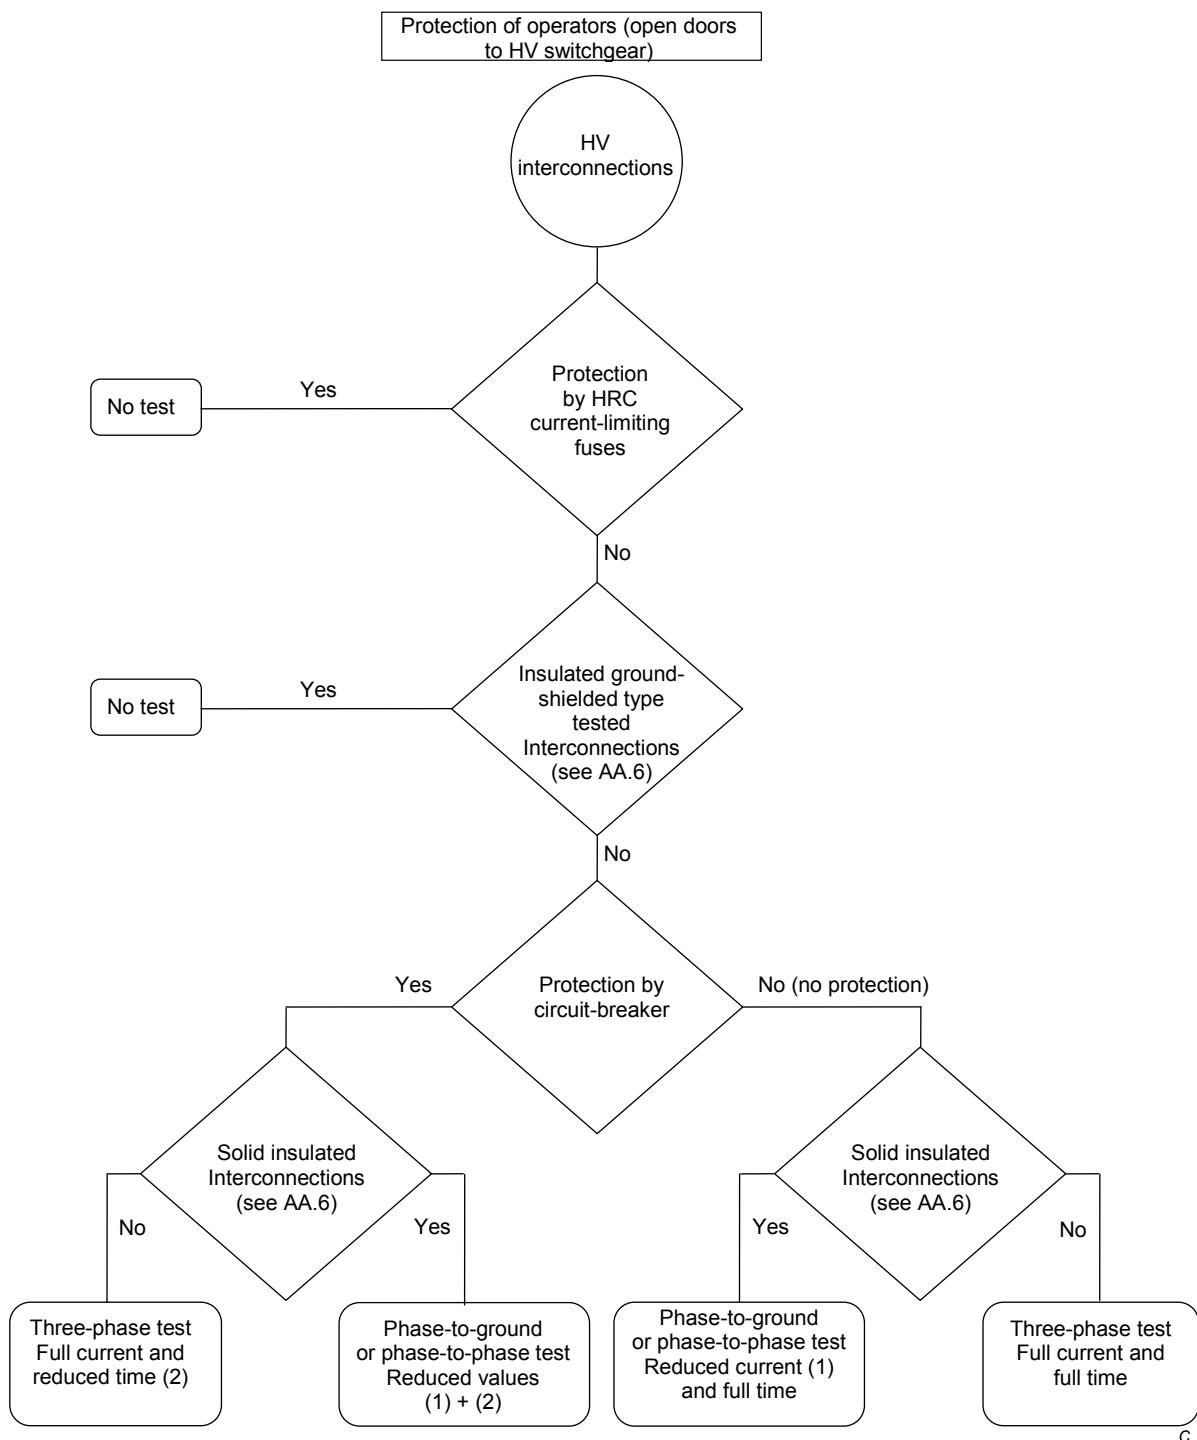

(1) IEC 62271-200:2011.

\* For phase to ground test the current value to be stated by the manufacturer.


\* For phase to phase test the current will be 87 % of the rated short-time withstand current.

(2) The time may be stated by the manufacturers, taking into account the time-setting of the protection.

**Figure AA.6 – Selection of tests on high voltage interconnections for class IAC-A**

**Figure AA.7 – Selection of tests on high voltage interconnections for class IAC-B**

*Replace the existing figure by the following new figure:*

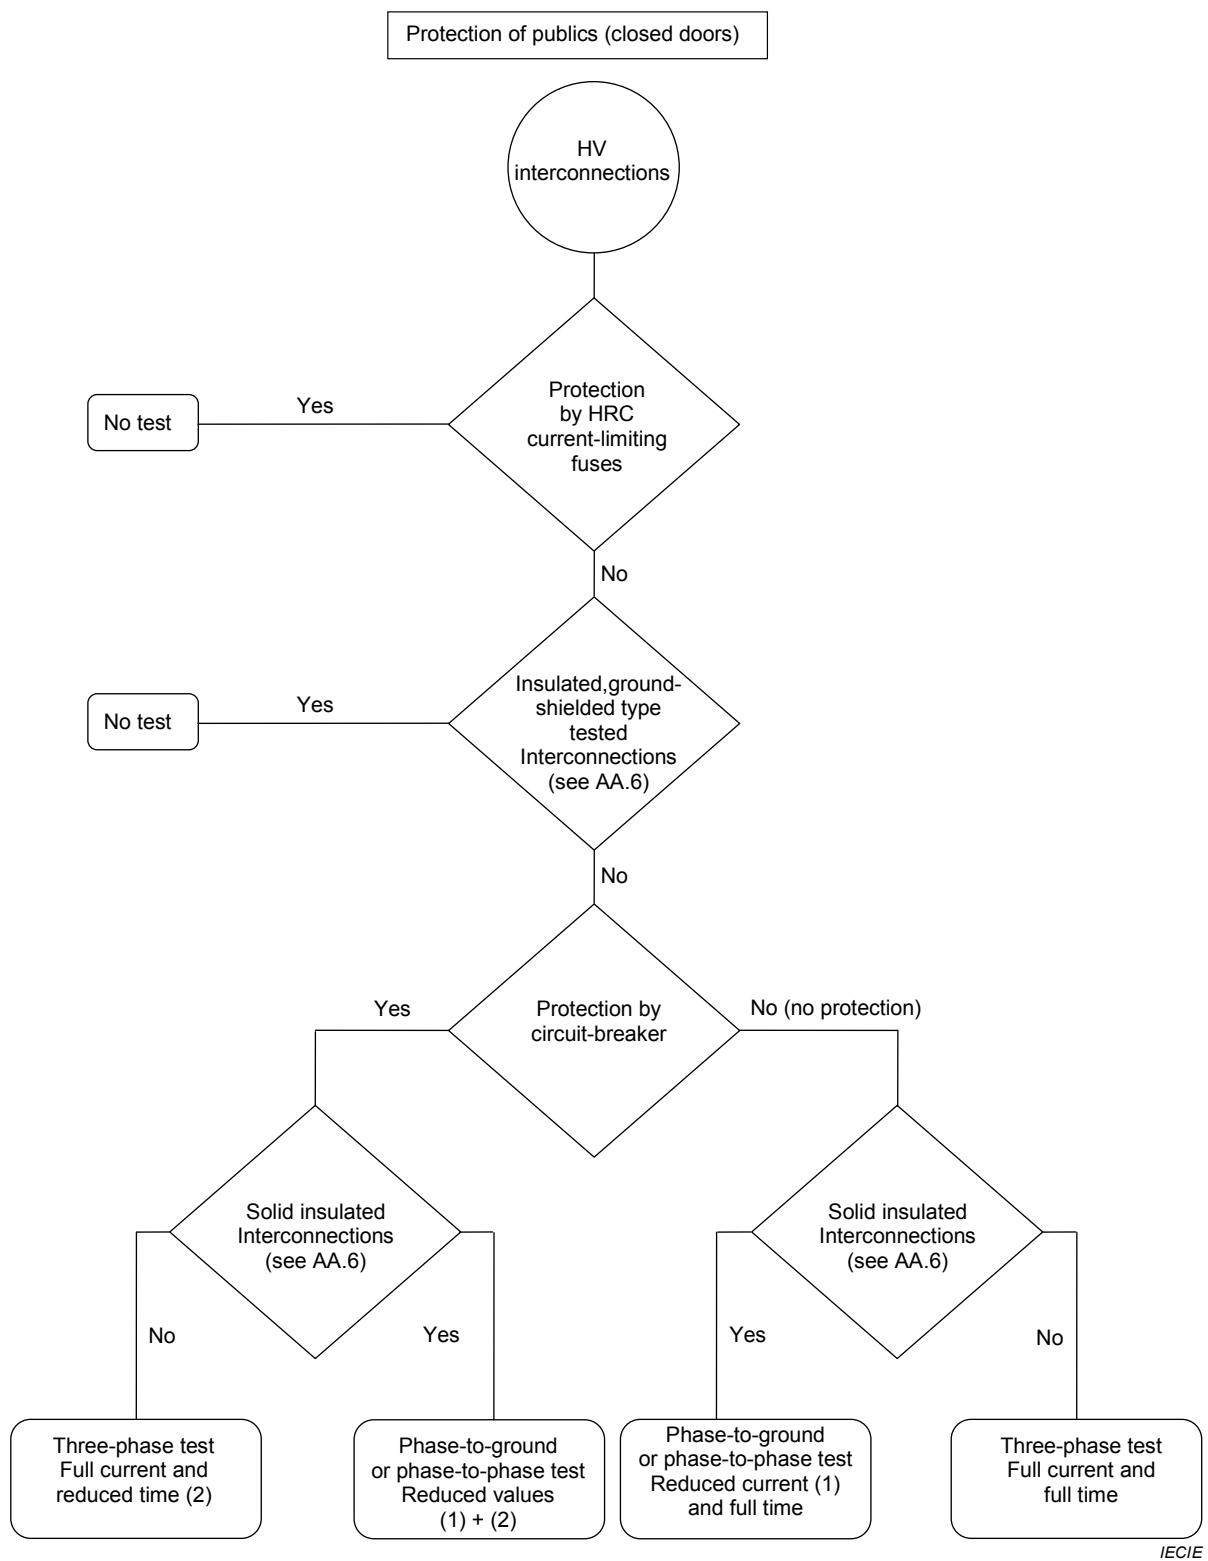

- (1) Applicability of phase to ground or phase to phase test according to the criteria in AA.5.2.1 of IEC 62271-200:2011.
  - \* For phase to ground test the current value to be stated by the manufacturer.
  - \* For phase to phase test the current will be 87 % of the rated short-time withstand current.
- (2) The time may be stated by the manufacturers, taking into account the time-setting of the protection.

**Figure AA.7 – Selection of tests on high voltage interconnections for class IAC-B**