

<b>STN</b>	<b>Zariadenia na zníženie hluku z cestnej dopravy Skúšobná metóda na určovanie akustických vlastností Časť 6: Vlastné charakteristiky Hodnoty in-situ vzduchovej nepriezvučnosti v podmienkach priameho zvukového poľa</b>	<b>STN EN 1793-6</b>  73 6041
------------	--	---

Road traffic noise reducing devices - Test method for determining the acoustic performance - Part 6: Intrinsic characteristics - In situ values of airborne sound insulation under direct sound field conditions

Táto norma obsahuje anglickú verziu európskej normy.  
This standard includes the English version of the European Standard.

Táto norma bola oznámená vo Vestníku ÚNMS SR č. 12/18

Obsahuje: EN 1793-6:2018

Oznámením tejto normy sa ruší  
STN EN 1793-6 (73 6041) z apríla 2014

**127651**

EUROPEAN STANDARD

EN 1793-6

NORME EUROPÉENNE

EUROPÄISCHE NORM

June 2018

ICS 17.140.30; 93.080.30

Supersedes EN 1793-6:2012

English Version

Road traffic noise reducing devices - Test method for  
determining the acoustic performance - Part 6: Intrinsic  
characteristics - In situ values of airborne sound insulation  
under direct sound field conditions

Dispositifs de réduction du bruit du trafic routier -  
Méthode d'essai pour la détermination de la  
performance acoustique - Partie 6 : Caractéristiques  
intrinsèques - Valeurs in situ d'isolation aux bruits  
aériens dans des conditions de champ acoustique  
direct

Lärmschutzvorrichtungen an Straßen - Prüfverfahren  
zur Bestimmung der akustischen Eigenschaften - Teil  
6: Produktspezifische Merkmale - In-situ-Werte der  
Luftschalldämmung in gerichteten Schallfeldern

This European Standard was approved by CEN on 19 February 2018.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

**EN 1793-6:2018 (E)**

<b>Contents</b>		<b>Page</b>
<b>European foreword</b> .....		<b>4</b>
<b>Introduction</b> .....		<b>6</b>
<b>1</b>	<b>Scope</b> .....	<b>8</b>
<b>2</b>	<b>Normative references</b> .....	<b>8</b>
<b>3</b>	<b>Terms and definitions</b> .....	<b>8</b>
<b>4</b>	<b>Sound insulation index measurements</b> .....	<b>13</b>
4.1	General principle.....	13
4.2	Measured quantity.....	13
4.3	Test arrangement.....	14
4.4	Measuring equipment .....	19
4.4.1	Components of the measuring system.....	19
4.4.2	Sound source.....	19
4.4.3	Test signal.....	19
4.5	Data processing.....	20
4.5.1	Calibration .....	20
4.5.2	Sample rate.....	20
4.5.3	Background noise .....	21
4.5.4	Scanning technique using a single microphone.....	21
4.5.5	Scanning technique using nine microphones .....	21
4.5.6	Adrienne temporal window .....	22
4.5.7	Placement of the Adrienne temporal window .....	23
4.5.8	Low frequency limit and sample size.....	24
4.6	Positioning of the measuring equipment.....	25
4.6.1	Selection of the measurement positions.....	25
4.6.2	Post measurements .....	26
4.6.3	Additional measurements.....	26
4.6.4	Reflecting objects .....	26
4.6.5	Safety considerations.....	26
4.7	Sample surface and meteorological conditions.....	27
4.7.1	Condition of the sample surface .....	27
4.7.2	Wind.....	27
4.7.3	Air temperature.....	27
4.8	Single-number rating.....	27
4.8.1	General.....	27
4.8.2	Acoustic elements .....	27
4.8.3	Posts.....	28
4.8.4	Global.....	28
<b>5</b>	<b>Measurement uncertainty</b> .....	<b>29</b>
<b>6</b>	<b>Measuring procedure</b> .....	<b>29</b>
<b>7</b>	<b>Test report</b> .....	<b>29</b>
<b>Annex A (informative) Categorization of single-number rating</b> .....		<b>31</b>
<b>Annex B (informative) Guidance note on use of the single-number rating</b> .....		<b>32</b>
<b>Annex C (informative) Measurement uncertainty</b> .....		<b>33</b>

<b>C.1</b>	<b>General .....</b>	<b>33</b>
<b>C.2</b>	<b>Measurement uncertainty based upon reproducibility data .....</b>	<b>33</b>
<b>C.3</b>	<b>Standard deviation of repeatability and reproducibility of the sound insulation index.....</b>	<b>33</b>
<b>Annex D</b>	<b>(informative) Template of test report on airborne sound insulation of road traffic noise reducing devices.....</b>	<b>36</b>
<b>D.1</b>	<b>General .....</b>	<b>36</b>
<b>D.2</b>	<b>Test setup (example).....</b>	<b>38</b>
<b>D.3</b>	<b>Test object and test situation (example).....</b>	<b>39</b>
<b>D.4</b>	<b>Results (example).....</b>	<b>42</b>
<b>D.4.1</b>	<b>Part 1 – Results for ‘element’ in tabular form .....</b>	<b>42</b>
<b>D.4.2</b>	<b>Part 2 – Results for ‘element’ in graphic form.....</b>	<b>43</b>
<b>D.4.3</b>	<b>Part 3 – Results for ‘post’ in tabular form.....</b>	<b>44</b>
<b>D.4.4</b>	<b>Part 4 – Results for ‘post’ in graphic form.....</b>	<b>45</b>
<b>D.4.5</b>	<b>Part 5 – Results for global condition (average of ‘element’ and ‘post’) in tabular form .....</b>	<b>46</b>
<b>D.4.6</b>	<b>Part 6 – Results for global condition (average of ‘element’ and ‘post’) in graphic form.....</b>	<b>47</b>
<b>D.5</b>	<b>Uncertainty (example).....</b>	<b>47</b>
	<b>Bibliography .....</b>	<b>50</b>

**EN 1793-6:2018 (E)****European foreword**

This document (EN 1793-6:2018) has been prepared by Technical Committee CEN/TC 226 "Road equipment", the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 2018, and conflicting national standards shall be withdrawn at the latest by December 2018.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 1793-6:2012.

With respect to the superseded document, the following changes have been made:

- an improved definition of the test signal and considerations about the Signal to Noise ( $S/N$ ) ratio;
- clarification on the calculation of single number ratings for qualification purposes and other purposes;
- the categories of single number rating have been removed from Annex A; the performance of the noise reducing device is, from now on, only to be reported in terms of the numeric values of the single number rating;
- revised information on the determination of measurement uncertainty.

EN 1793-6 is part of a series of documents and will be read in conjunction with the following:

- EN 1793-1, *Road traffic noise reducing devices - Test method for determining the acoustic performance - Part 1: Intrinsic characteristics of sound absorption under diffuse sound field conditions*;
- EN 1793-2, *Road traffic noise reducing devices - Test method for determining the acoustic performance - Part 2: Intrinsic characteristics of airborne sound insulation under diffuse sound field conditions*;
- EN 1793-3, *Road traffic noise reducing devices - Test method for determining the acoustic performance - Part 3: Normalized traffic noise spectrum*;
- EN 1793-4, *Road traffic noise reducing devices - Test method for determining the acoustic performance - Part 4: Intrinsic characteristics - In situ values of sound diffraction*;
- EN 1793-5, *Road traffic noise reducing devices - Test method for determining the acoustic performance - Part 5: Intrinsic characteristics - In situ values of sound reflection under direct sound field conditions*.

This European Standard has been prepared, under the direction of Technical Committee CEN/TC 226 "Road equipment", by Working Group 6 "Noise reducing devices".

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria,

Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

**EN 1793-6:2018 (E)****Introduction**

Noise reducing devices alongside roads should provide adequate sound insulation so that sound transmitted through the device is not significant compared with the sound diffracted over the top. This document specifies a test method for assessing the intrinsic airborne sound insulation performance for noise reducing devices designed for roads in non-reverberant conditions. It can be applied *in situ*, i.e. where the noise reducing devices are installed. The method can be applied without damaging the surface of the noise reducing device.

The method can be used to qualify products to be installed along roads as well as to verify the compliance of installed noise reducing devices to design specifications. Regular application of the method can be used to verify the long term performance of noise reducing devices.

The method requires the averaging of results of measurements taken at different points behind the device under test. The method is able to investigate flat and non-flat products.

The method uses the same principles and equipment for measuring sound reflection (see EN 1793-5) and airborne sound insulation (the present document).


The measurement results of this method for airborne sound insulation are comparable but not identical with the results of the EN 1793-2 method, mainly because the present method uses a directional sound field, while the EN 1793-2 method assumes a diffuse sound field (where all angles of incidence are equally probable). Research studies suggest that good correlation exists between laboratory data, measured according to EN 1793-2 and field data, measured according to the method described in the present document [4], [5], [6], [7], [15].

The test method described in this document should not be used to determine the intrinsic characteristics of airborne sound insulation for noise reducing devices to be installed in reverberant conditions, e.g. inside tunnels or deep trenches or under covers.


For the purpose of this document, reverberant conditions are defined based on the geometric envelope,  $e$ , across the road formed by the barriers, trench sides or buildings (the envelope does not include the road surface) as shown by the dashed lines in Figure 1. Conditions are defined as being reverberant when the percentage of open space in the envelope is less than or equal to 25 %, i.e. reverberant conditions occur when  $w/e \leq 0,25$ , where  $e = (w+h_1+h_2)$ .

This document introduces a specific quantity, called sound insulation index, to define the airborne sound insulation of a noise reducing device. This quantity should not be confused with the sound reduction index used in building acoustics, sometimes also called transmission loss.


NOTE This method can be used to qualify noise reducing devices for other applications, e.g. to be installed nearby industrial sites. In this case, the single-number ratings can preferably be calculated using an appropriate spectrum.

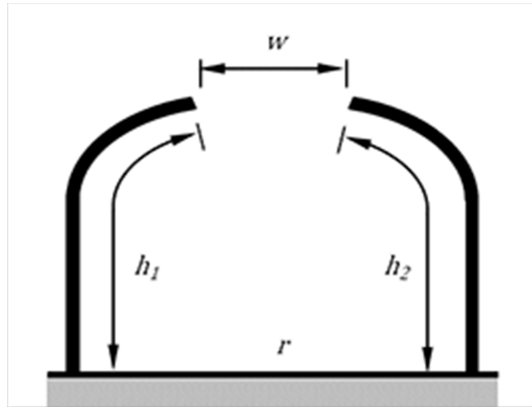


a) Partial cover on both sides of the road;  
envelope,  $e = w + h_1 + h_2$

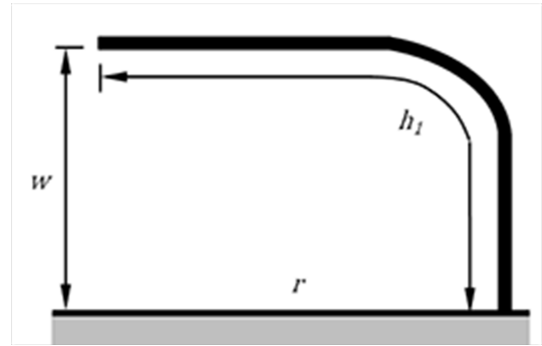

b) Partial cover on one side of the road;  
envelope,  $e = w + h_1$

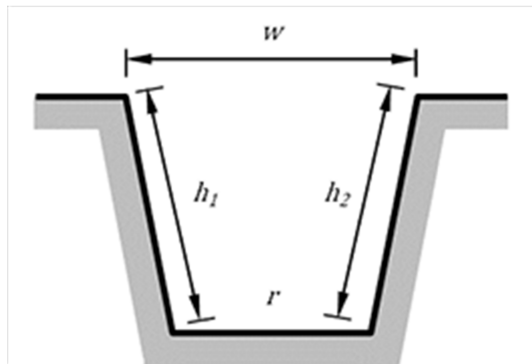

c) Deep trench;  
envelope,  $e = w + h_1 + h_2$

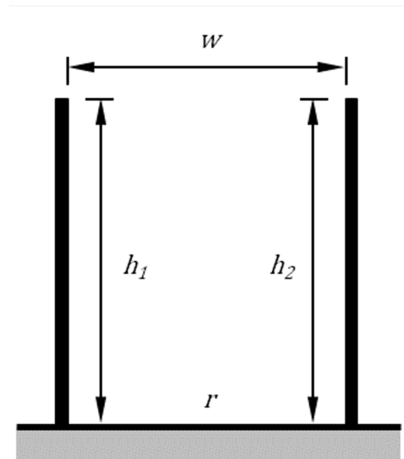

d) Tall barriers or buildings;  
envelope,  $e = w + h_1 + h_2$

#### Key

r road surface

w width of open space

$h_1$  Developed length of element, e.g. cover, trench side, barrier or building

$h_2$  Developed length of element, e.g. cover, trench side, barrier or building

NOTE Figure 1 is not to scale.

**Figure 1 — Sketch of the reverberant condition check in four cases**



**EN 1793-6:2018 (E)****1 Scope**

This document describes a test method for measuring a quantity representative of the intrinsic characteristics of airborne sound insulation for traffic noise reducing devices: the sound insulation index.

The test method is intended for the following applications:

- determination of the intrinsic characteristics of airborne sound insulation of noise reducing devices to be installed along roads, to be measured either *in situ* or in laboratory conditions;
- determination of the *in situ* intrinsic characteristics of airborne sound insulation of noise reducing devices in actual use;
- comparison of design specifications with actual performance data after the completion of the construction work;
- verification of the long term performance of noise reducing devices (with a repeated application of the method);
- interactive design process of new products, including the formulation of installation manuals.

The test method is not intended for the determination of the intrinsic characteristics of airborne sound insulation of noise reducing devices to be installed in reverberant conditions, e.g. inside tunnels or deep trenches or under covers.

Results are expressed as a function of frequency in one-third octave bands, where possible, between 100 Hz and 5 kHz. If it is not possible to get valid measurement results over the whole frequency range indicated, the results will be given in a restricted frequency range and the reasons for the restriction(s) will be clearly reported.

**2 Normative references**

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1793-3, *Road traffic noise reducing devices - Test method for determining the acoustic performance – Part 3: Normalized traffic noise spectrum*

EN 61672-1, *Electroacoustics - Sound level meters – Part 1: Specifications (IEC 61672 1)*

ISO/IEC Guide 98-3, *Uncertainty of measurement – Part 3: Guide to the expression of uncertainty in measurement (GUM:1995)*

**koniec náhľadu – text ďalej pokračuje v platenej verzii STN**