

TNI	Navrhovanie kotvenia do betónu Kotevné nosníky Doplnkové pravidlá	TNI CEN/TR 17080 73 1254
------------	--	--

Design of fastenings for use in concrete - Anchor channels - Supplementary rules

Táto technická normalizačná informácia obsahuje anglickú verziu CEN/TR 17080:2018.
This Technical standard information includes the English version of CEN/TR 17080:2018.

Táto technická normalizačná informácia bola oznámená vo Vestníku ÚNMS SR č. 01/19

128052

TECHNICAL REPORT**CEN/TR 17080****RAPPORT TECHNIQUE****TECHNISCHER BERICHT**

September 2018

ICS 21.060.01; 91.080.40

English Version

**Design of fastenings for use in concrete - Anchor channels -
Supplementary rules**Bemessung der Verankerung von Befestigungen in
Beton - Ankerschienen - Ergänzende Regelungen

This Technical Report was approved by CEN on 9 April 2017. It has been drawn up by the Technical Committee CEN/TC 250.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG**CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels**

CEN/TR 17080:2018 (E)

Contents	Page
European foreword	3
Introduction	4
1 Scope	5
2 Normative references	6
3 Terms, definitions, symbols and units	6
4 Basis of design	8
5 Durability	9
6 Derivation of forces acting on anchor channels - Analysis	9
6.1 General	9
6.2 Tension loads	10
6.3 Shear loads	10
6.3.1 Shear loads $V_{Ed,y}$ acting transverse to the longitudinal axis of the channel	10
6.3.2 Shear loads $V_{Ed,x}$ acting in direction of the longitudinal axis of the channel	10
7 Verification of ultimate limit state	13
7.1 Tension load	13
7.2 Shear load	13
7.2.1 Shear load $V_{Ed,y}$ acting transverse to the longitudinal channel axis	13
7.2.2 Shear load $V_{Ed,x}$ acting in direction of the longitudinal axis of the channel	13
7.3 Combined tension and shear loads	19
7.3.1 Anchor channels without supplementary reinforcement	19
7.3.2 Anchor channels with supplementary reinforcement	21
8 Improved model for the design of anchor channels close to an edge subjected to a shear load transverse to the longitudinal channel axis with supplementary reinforcement	22
8.1 General	22
8.2 Anchor channels arranged parallel to the edge	22
8.2.1 General	22
8.2.2 Characteristic resistance	25
9 Verification of serviceability limit state	27
Bibliography	28

European foreword

This document (CEN/TR 17080:2018) has been prepared by Technical Committee CEN/TC 250 “Structural Eurocodes”, the secretariat of which is held by BSI.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

CEN/TR 17080:2018 (E)**Introduction**

CEN/TR 17080 provides supplementary rules for the design of anchor channels for cases not currently covered by EN 1992-4:2018, namely,

- the design of anchor channels subject to shear force acting in the longitudinal direction of the channel;
- the design for the combined action of longitudinal shear, transverse shear and tension load acting on the anchor channel; and
- the design of supplementary reinforcement for anchor channels subject to shear force in longitudinal direction.

The proposed design rules follow closely the design model for headed fasteners. They have been derived from the results of current research.

In addition, rules alternative to EN 1992-4 for the design of supplementary reinforcement to carry shear loads transverse to the longitudinal axis of the channel are given.

This Technical Report is intended to be used in conjunction with EN 1992-4.

The numerical values for partial factors and other reliability parameters are recommended values and may be changed in a National Annex of EN 1992-4, if required. The recommended values apply when:

- a) the anchor channels comply with the requirements of EN 1992-4:2018, 1.2, and
- b) the execution complies with the requirements of EN 1992-4:2018, 4.6 and Annex F.

NOTE The proposed design method for shear loading acting in longitudinal direction of the channel can be realized only if the relevant parameters as specified in this CEN/TR, e.g. characteristic resistances and product dependent partial factors are given in a European Technical Product Specification.

1 Scope

EN 1992-4:2018 covers anchor channels located in cracked or uncracked concrete subjected to tensile loads and/or shear loads transverse to the longitudinal channel axis as well as combinations of these loads. Shear loads acting in direction of the longitudinal axis of the channel and combinations of shear loads acting transverse and in direction of the longitudinal axis of the channel, combinations of tensile loads and shear loads acting in direction of the longitudinal axis of the channel and combinations of loads in all three directions are excluded.

This Technical Report provides design rules for anchor channels under static and quasi-static shear loads acting in direction of the longitudinal channel axis and all possible combinations of shear and tension loads acting on the channel as well as design rules for anchor channels with supplementary reinforcement to take up shear loads, additional and alternative to the provisions of EN 1992-4:2018. All relevant failure modes are considered and will be verified. Fatigue, impact and seismic loads are not covered.

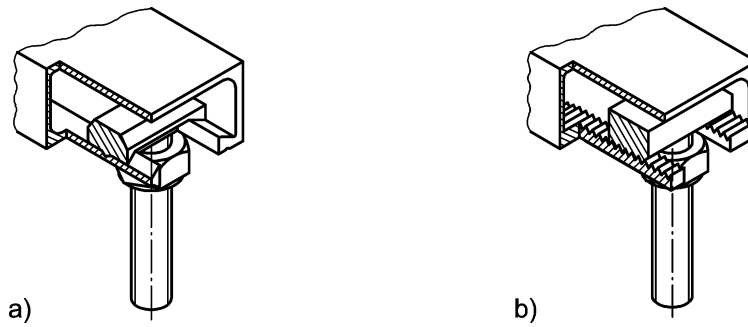
The design rules in this document are only valid for anchor channels with a European Technical Product Specification. The design provisions for shear loads acting in direction of the longitudinal axis of the channel cover the following anchor channels and applications:

- Anchor channels with 2 or 3 anchors.
- Anchor channels where the shear load in the longitudinal axis of the channel is transferred to the channel by corresponding locking channel bolts creating mechanical interlock by means of a notch in the channel lips or serrated channel bolts which interlock with serrated lips of the channel (Figure 1).
- Anchor channels produced from steel with at least two metal anchors rigidly connected to the back of the channel (e.g. by welding, forging or screwing). The anchor channels are placed flush with the concrete surface. A fixture is connected to the anchor channel by channel bolts with nut and washer.
- Anchor channels close to the edge placed either parallel or transverse to the edge of the concrete member. The design provisions for concrete edge failure do not cover channel orientations inclined to the concrete edge.

The design method for anchor channels loaded in shear in direction of the longitudinal axis of the channel follows closely the existing design model for headed fasteners. For reasons of simplicity modifications specific for anchor channels are used where necessary.

The design provisions for the supplementary reinforcement to take up shear loads in case of anchor channels situated parallel to the edge and loaded in shear transverse to the longitudinal axis apply to anchor channels with unlimited number of anchors.

Examples of anchor channels and channel bolts ensuring mechanical interlock are given in Figure 1.

CEN/TR 17080:2018 (E)**Key**

- a) notching channel bolt creating a notch in the channel
- b) channel with serrated lips and matching locking channel bolt

Figure 1 — Anchor channels with mechanical interlock - Examples**2 Normative references**

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1992-1-1, *Eurocode 2: Design of concrete structures — Part 1-1: General rules and rules for buildings*

EN 1992-1-2, *Eurocode 2: Design of concrete structures — Part 1-2: General rules — Structural fire design*

EN 1992-4:2018, *Eurocode 2 — Design of concrete structures — Part 4: Design of fastenings for use in concrete*

koniec náhľadu – text ďalej pokračuje v platenej verzii STN