

STN P	Inteligentné dopravné systémy Bezpečnostné služby staníc IDS na vytvorenie relácie a overenie medzi dôveryhodnými zariadeniami (ISO/TS 21177: 2019)	STN P CEN ISO/TS 21177 01 8623
------------------	--	--

Intelligent transport systems - ITS station security services for secure session establishment and authentication between trusted devices (ISO/TS 21177:2019)

Táto norma obsahuje anglickú verziu európskej normy.
This standard includes the English version of the European Standard.

Táto norma bola oznámená vo Vestníku ÚNMS SR č. 03/20

Táto predbežná STN je určená na overenie. Pripomienky zasielajte ÚNMS SR najneskôr do októbra 2021.

Obsahuje: CEN ISO/TS 21177:2019, ISO/TS 21177:2019

130508

TECHNICAL SPECIFICATION
SPÉCIFICATION TECHNIQUE
TECHNISCHE SPEZIFIKATION

CEN ISO/TS 21177

October 2019

ICS 03.220.01; 35.030; 35.240.60

English Version

**Intelligent transport systems - ITS station security services
for secure session establishment and authentication
between trusted devices (ISO/TS 21177:2019)**

Systèmes intelligents de transport - Interface véhicule
sécurisée - Services de sécurité de la station ITS pour
l'établissement et l'authentification des sessions
sécurisées (ISO/TS 21177:2019)

Intelligente Verkehrssysteme - Sicherheitsdienste für
eine ITS-Station zum sicheren Aufbau und
Authentizierung einer Sitzung zwischen zuverlässigen
Geräten (ISO/TS 21177:2019)

This Technical Specification (CEN/TS) was approved by CEN on 13 August 2019 for provisional application.

The period of validity of this CEN/TS is limited initially to three years. After two years the members of CEN will be requested to submit their comments, particularly on the question whether the CEN/TS can be converted into a European Standard.

CEN members are required to announce the existence of this CEN/TS in the same way as for an EN and to make the CEN/TS available promptly at national level in an appropriate form. It is permissible to keep conflicting national standards in force (in parallel to the CEN/TS) until the final decision about the possible conversion of the CEN/TS into an EN is reached.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

CEN ISO/TS 21177:2019 (E)

Contents	Page
European foreword.....	3

European foreword

This document (CEN ISO/TS 21177:2019) has been prepared by Technical Committee ISO/TC 204 "Intelligent transport systems" in collaboration with Technical Committee CEN/TC 278 "Intelligent transport systems" the secretariat of which is held by NEN.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO/TS 21177:2019 has been approved by CEN as CEN ISO/TS 21177:2019 without any modification.

**TECHNICAL
SPECIFICATION**

**ISO/TS
21177**

First edition
2019-08

**Intelligent transport systems —
ITS station security services for
secure session establishment and
authentication between trusted devices**



Reference number
ISO/TS 21177:2019(E)

© ISO 2019

**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	vi
Introduction	vii
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and abbreviated terms	2
5 Overview	3
5.1 Goals.....	3
5.2 Architecture and functional entities.....	4
5.3 Cryptomaterial handles.....	7
5.4 Session IDs and state.....	7
5.5 Access control and authorisation state.....	8
5.6 Application level non-repudiation.....	8
5.7 Service primitive conventions.....	8
6 Process flows and sequence diagrams	9
6.1 General.....	9
6.2 Overview of process flows.....	9
6.3 Sequence diagram conventions.....	10
6.4 Configure.....	11
6.5 Start Session.....	12
6.6 Send data.....	14
6.7 Send access control PDU.....	17
6.8 Receive PDU.....	18
6.9 Secure connection brokering.....	23
6.9.1 Goals.....	23
6.9.2 Prerequisites.....	24
6.9.3 Overview.....	24
6.9.4 Detailed specification.....	25
6.10 Force end session.....	33
6.11 Session terminated at session layer.....	35
6.12 Deactivate.....	35
6.13 Secure session example.....	36
7 Security Subsystem: interfaces and data types	38
7.1 General.....	38
7.2 Access control policy and state.....	39
7.3 Enhanced authentication.....	40
7.3.1 Definition and possible states.....	40
7.3.2 States for owner role enhanced authentication.....	40
7.3.3 State for accessor role enhanced authentication.....	41
7.3.4 Use by Access Control.....	42
7.3.5 Methods for providing enhanced authentication.....	42
7.3.6 Enhanced authentication using SPAKE2.....	42
7.4 Extended authentication.....	43
7.5 Data types.....	44
7.5.1 General.....	44
7.5.2 Imports.....	44
7.5.3 Iso21177AccessControlPdu.....	44
7.5.4 AccessControlResult.....	44
7.5.5 ExtendedAuthPdu.....	44
7.5.6 ExtendedAuthRequest.....	45
7.5.7 InnerExtendedAuthRequest.....	45
7.5.8 AtomicExtendedAuthRequest.....	46

ISO/TS 21177:2019(E)

7.5.9	ExtendedAuthResponse.....	46
7.5.10	ExtendedAuthResponsePayload.....	46
7.5.11	EnhancedAuthPdu.....	47
7.5.12	SpakeRequest.....	47
7.5.13	SpakeResponse.....	47
7.5.14	SpakeRequesterResponse.....	48
7.6	App-Sec Interface.....	48
7.6.1	App-Sec-Configure.request.....	48
7.6.2	App-Sec-Configure.confirm.....	49
7.6.3	App-Sec-StartSession.indication.....	49
7.6.4	App-Sec-Data.request.....	50
7.6.5	App-Sec-Data.confirm.....	50
7.6.6	App-Sec-Incoming.request.....	51
7.6.7	App-Sec-Incoming.confirm.....	51
7.6.8	App-Sec-EndSession.request.....	52
7.6.9	App-Sec-EndSession.confirm.....	52
7.6.10	App-Sec-EndSession.indication.....	52
7.6.11	App-Sec-Deactivate.request.....	53
7.6.12	App-Sec-Deactivate.confirm.....	53
7.6.13	App-Sec-Deactivate.indication.....	53
7.7	Security Subsystem internal interface.....	54
7.7.1	General.....	54
7.7.2	Sec-AuthState.request.....	54
7.7.3	Sec-AuthState.confirm.....	55
8	Adaptor Layer: Interfaces and data types.....	55
8.1	General.....	55
8.2	Data types.....	56
8.2.1	General.....	56
8.2.2	Iso21177AdaptorLayerPDU.....	56
8.2.3	Apdu.....	57
8.2.4	Access Control.....	57
8.2.5	TlsClientMsg1.....	57
8.2.6	TlsServerMsg1.....	57
8.3	App-AL Interface.....	57
8.3.1	App-AL-Data.request.....	57
8.3.2	App-AL-Data.confirm.....	58
8.3.3	App-AL-Data.indication.....	58
8.3.4	App-AL-EnableProxy.request.....	59
8.4	Sec-AL Interface.....	61
8.4.1	Sec-AL-AccessControl.request.....	61
8.4.2	Sec-AL-AccessControl.confirm.....	61
8.4.3	Sec-AL-AccessControl.indication.....	61
8.4.4	Sec-AL-EndSession.request.....	62
8.4.5	Sec-AL-EndSession.confirm.....	62
9	Secure Session services.....	62
9.1	General.....	62
9.2	App-Sess interfaces.....	62
9.2.1	App-Sess-EnableProxy.request.....	62
9.3	Sec-Sess interface.....	63
9.3.1	Sec-Sess-Configure.request.....	63
9.3.2	Sec-Sess-Configure.confirm.....	65
9.3.3	Sec-Sess-Start.indication.....	65
9.3.4	Sec-Sess-EndSession.indication.....	66
9.3.5	Sec-Sess-Deactivate.request.....	66
9.3.6	Sec-Sess-Deactivate.confirm.....	67
9.4	AL-Sess interface.....	67
9.4.1	AL-Sess-Data.request.....	67

9.4.2	AL-Sess-Data.confirm.....	67
9.4.3	AL-Sess-Data.indication.....	68
9.4.4	AL-Sess-EndSession.request.....	68
9.4.5	AL-Sess-EndSession.confirm.....	68
9.4.6	AL-Sess-ClientHelloProxy.request.....	69
9.4.7	AL-Sess-ClientHelloProxy.indication.....	69
9.4.8	AL-Sess-ServerHelloProxy.request.....	70
9.4.9	AL-Sess-ServerHelloProxy.indication.....	70
9.4.10	AL-Sess-EndSession.request.....	71
9.4.11	AL-Sess-EndSession.confirm.....	72
9.5	Permitted mechanisms.....	72
9.5.1	TLS 1.3.....	72
9.5.2	DTLS 1.3.....	73
Annex A (informative) Usage scenarios.....		74
Annex B (normative) ASN.1 module.....		81
Bibliography.....		82

ISO/TS 21177:2019(E)**Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document is about ITS station security services required to ensure the authenticity of the source and confidentiality and integrity of application activities taking place between *trusted devices*.

The trust relation between two devices is illustrated in [Figure 1](#). Two devices cooperate in a trusted way, i.e. exchange information with optional explicit bi-directional protection.

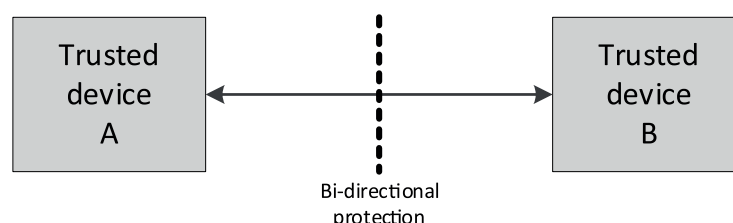


Figure 1 — Interconnection of trusted devices

According to ISO 21217, an ITS station unit (ITS-SU), i.e. the physical implementation of the ITS station (ITS-S) functionality, is a trusted device, and an ITS-SU may be composed of ITS station communication units (ITS-SCU) that are interconnected via an ITS station-internal network. Thus an ITS-SCU is the smallest physical entity of an ITS-SU that is referred to as a trusted device.

NOTE 1 ISO 21217 fully covers the functionality of EN 302 665^[15], which is a predecessor of ISO 21217.

NOTE 2 An ITS-SU can be composed of ITS-SCUs from different vendors where each ITS-SCU is linked to a different ITS-SCU configuration and management centre specified in ISO 24102-2^[5] and ISO 17419. Station-internal management communications between ITS-SCUs of the same ITS-SU is specified in ISO 24102-4^[2]. European C-ITS regulation refers to the "ITS-SCU configuration and management centre" as "C-ITS station operator" meaning the entity responsible for the operation of a C-ITS station. The C-ITS station operator can be responsible for the operation of one single C-ITS station (fixed or mobile), or a C-ITS infrastructure composed of a number of fixed C-ITS stations, or a number of mobile ITS-Stations.

Four implementation contexts of communication nodes in ITS communications networks are identified in the ITS station and communication architecture ISO 21217, each comprised of ITS-station units (ITS-SU) taking on a particular role; personal, vehicular, roadside, or central. These ITS-SUs are ITS-secured communication nodes as required in ISO 21217 that participate in a wide variety of ITS services related to, e.g. sustainability, road safety and transportation efficiency.

Over the last decade, ITS services have arisen that require secure access to data from Sensor and Control Networks (SCN), e.g. from In-Vehicle Networks (IVN) and from Infrastructure/Roadside Networks (IRN), some of which require secure local access to time-critical information; see [Figures 2](#) and [3](#).

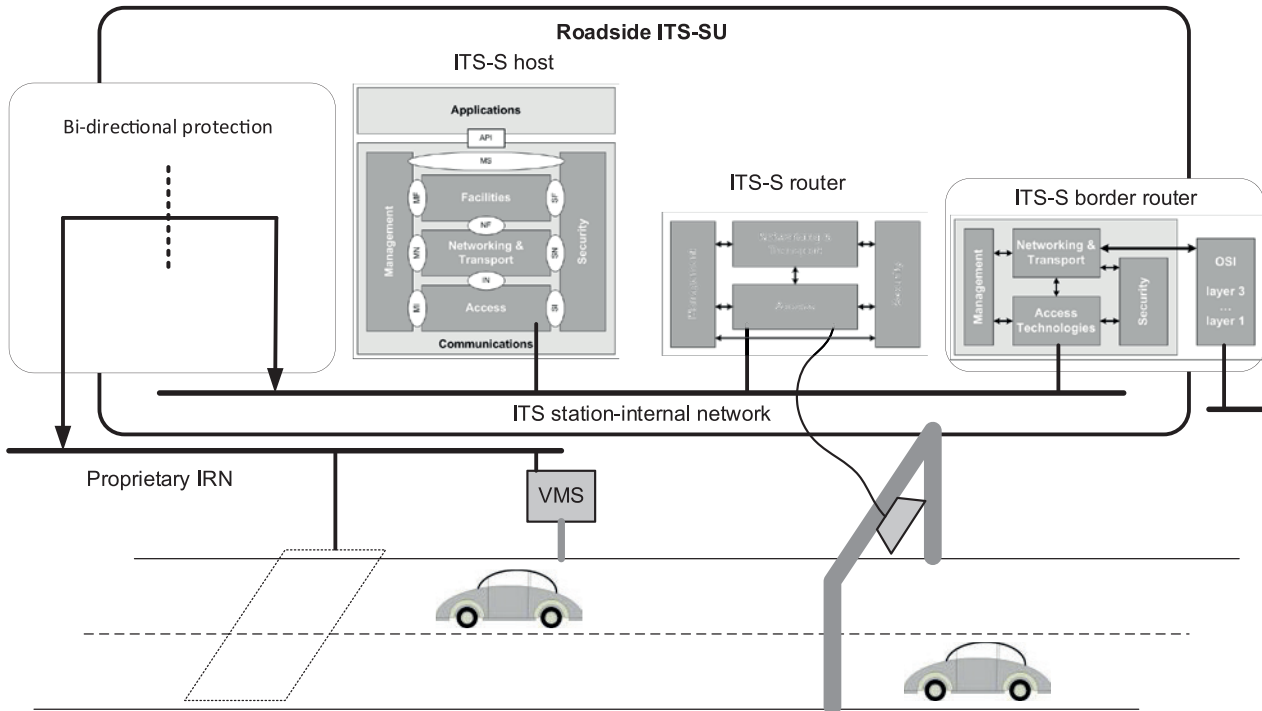


Figure 2 — Example of a roadside ITS-SU connected with proprietary IRN

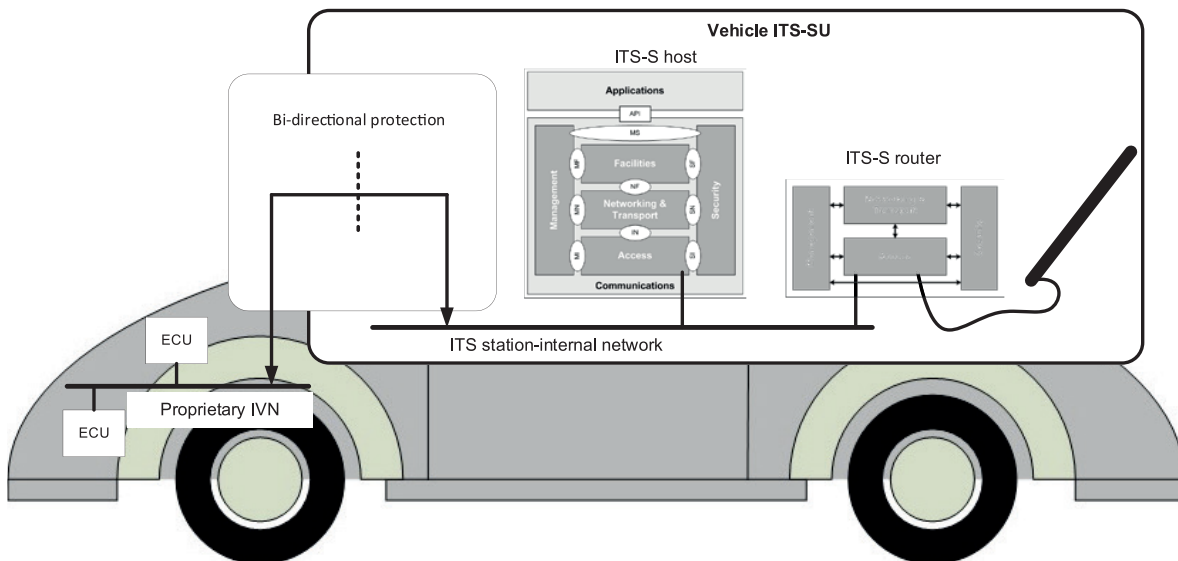


Figure 3 — Example of a vehicle ITS-SU connected with proprietary IRN

Trust in the ITS domain primarily is between ITS Station Communication Units (ITS-SCUs) introduced in ISO 21217; see [Figure 4](#).

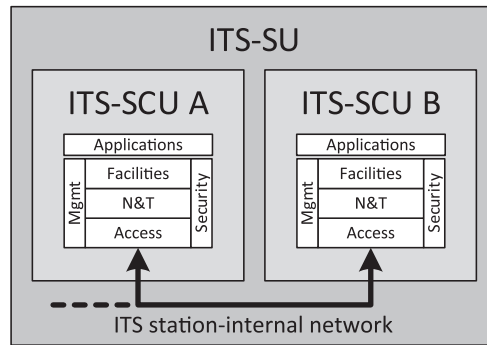


Figure 4 — Interconnection of ITS-SCUs in an ITS-SU

ITS-SCUs are interconnected via an ITS station-internal network. Applying basic security means specified in this document, the ITS-SCUs trust each other. Additionally, protocol data units exchanged between ITS-SCUs may be further protected by additional means, e.g. applying encryption. Major application domains of secure communications between ITS-SCUs of the same ITS-SU are local station management specified in ISO 24102-1^[4] using station-internal management communications specified in ISO 24102-4^[7].

Trust in the ITS domain further is between ITS-SUs introduced in ISO 21217; see [Figure 5](#).

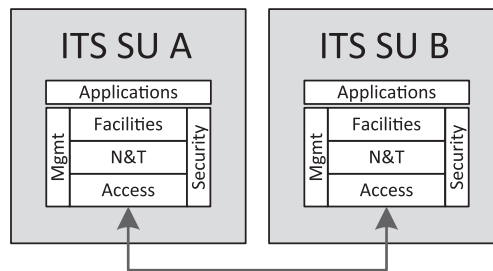


Figure 5 — Interconnection of ITS-SUs

Applying basic security means specified in this document, the ITS-SUs can establish secure application sessions. Establishment of sessions either needs a-priori knowledge about a session partner or can be achieved by means of service announcement specified in ISO 22418^[3]. Further on, broadcast of messages is secured by means of authenticating the sender of such a message, applicable for the service advertisement message (SAM) specified in ISO/TS 16460^[1] and used in ISO 22418^[3]. Additionally, other security means may be applied, e.g. encryption of messages.

A further trust relation in the ITS domain is between an ITS-SU consisting of one or several ITS-SCUs and a sensor and control network (SCN). Trust is achieved by applying security means in an interface as illustrated in [Figure 6](#) with details specified in this document.

ISO/TS 21177:2019(E)

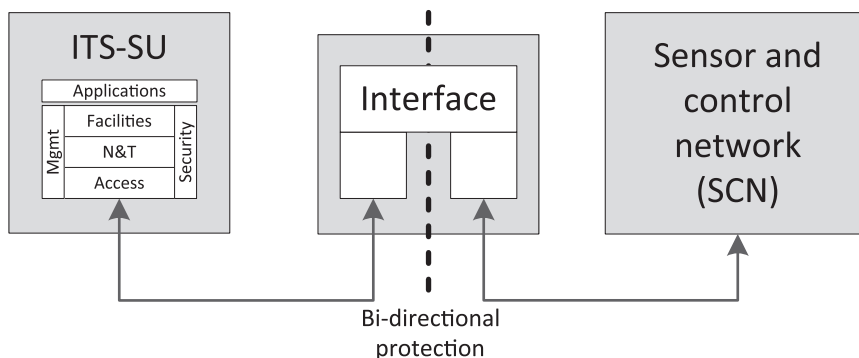


Figure 6 — Interface between ITS-SU and sensor and control network

The interface presented in [Figure 6](#) may be a stand-alone device, or may be integrated in the ITS-SU, or may be part of the SCN. Examples of SCNs are "In-Vehicle Networks" (IVN) and "Infrastructure/Roadside Networks" (IRN).

Related use cases of these ITS services have largely been derived from regulatory requirements and ITS operational needs, and they include:

- secure real-time access to time-critical vehicle-related data for safety of life and property applications, e.g. collision avoidance, emergency electronic brake light and event determination;
- secure local access to detailed real-time data for efficiency applications (traffic management), e.g. intersection interaction, congestion avoidance, dynamic priorities;
- protection of private data, e.g. in compliance with the European "General Data Protection Regulation" (GDPR)^[16];
- local access to certified real-time data for sustainability applications, e.g. dynamic emission zones (controlled zones as currently standardized in CEN TC 278 within the Project Team PT 1705 funded by the European Commission), intersection priorities based on emissions, interactive optimum vehicle settings to minimize fuel consumption.

There are many use cases of ITS services currently identified where real-time exchange of time-critical information between ITS-SUs in close proximity is essential, and the number will grow, see e.g. the US National ITS Reference Architecture^[17]. It is critical that ultimately all ITS-SUs in a given area are able to be engaged in these distributed services. This, in turn, requires vehicle ITS-SUs to have real-time access to vehicle data, and roadside ITS-SUs to have real-time access to infrastructure data. All ITS-SUs need being capable of secure software updates.

According to ISO 21217, an ITS-SCU of an ITS-SU can communicate with devices that, in a strict sense, are not compliant with the architecture specified in ISO 21217. However, in order to have trusted communications, a certain minimum level of security measures must be shared between an ITS-SCU and such an external device. Examples of such external devices are a node in the Internet, or a node in a sensor and control network. In this document, the assumption is made that ITS-S application processes operating on ITS-SUs are issued with *certificates* by a Certificate Authority (CA), and that the CA is a trusted third party in the sense that before issuing the certificate to the ITS-S application process, it ensures that the ITS-SU on which the ITS-S application process is resident meets the minimum security requirements for that application. This allows peer ITS-S application processes which observe that an ITS-S application process possesses a valid certificate to have a level of assurance that the ITS-S application process is in fact secure and trustworthy.

The subject of this document thus is three-fold:

- 1) Specify ITS station security services for enabling trust between ITS-S application processes running on different ITS-SCUs of the same ITS-SU, i.e. establishing a trusted processing platform, considering also trust inside an ITS-SCU:
 - protection of applications from the actions of other applications;
 - protection of shared information;
 - protection of shared processing resources such as communications software and hardware, which includes methods of prioritisation and restricted access.
- 2) Specify ITS station security services for enabling trust between ITS-S application processes running on the same ITS-SU.
- 3) Extend these ITS security services for enabling trust between an ITS-SCU and devices being part of a sensor and control network.

NOTE 3 It is intended to extend the subject of this document in future editions.

Such security services include e.g. the basic security features of:

- a) authentication and authorisation;
- b) confidentiality and privacy;
- c) data integrity;
- d) non-repudiation.

Tasks related to communications are:

- a) establishing secure sessions for bi-directional communications, e.g. based on service advertisement specified in ISO 22418^[3];
- b) authenticating a sender of broadcast messages, e.g. CAM, DENM, BSM, SPaT, MAP, FSAM, WSA;
- c) encrypting messages.

NOTE 4 Tasks b) and c) above related to communications are already specified in other standards, see e.g. IEEE Std. 1609.2™ and several related standards from ETSI TC ITS.

Intelligent transport systems — ITS station security services for secure session establishment and authentication between trusted devices

1 Scope

This document contains specifications for a set of ITS station security services required to ensure the authenticity of the source and integrity of information exchanged between trusted entities:

- devices operated as bounded secured managed entities, i.e. "ITS Station Communication Units" (ITS-SCU) and "ITS station units" (ITS-SU) specified in ISO 21217, and
- between ITS-SUs (composed of one or several ITS-SCUs) and external trusted entities such as sensor and control networks.

These services include authentication and secure session establishment which are required to exchange information in a trusted and secure manner.

These services are essential for many ITS applications and services including time-critical safety applications, automated driving, remote management of ITS stations (ISO 24102-2^[5]), and roadside/infrastructure related services.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 17419, *Intelligent transport systems — Cooperative systems — Globally unique identification*

IEEE Std 1609.2™, *IEEE Standard for Wireless Access in Vehicular Environments — Security Services for Applications and Management Messages*

koniec náhľadu – text ďalej pokračuje v platenej verzii STN