

<b>STN</b>	<b>Geotechnický prieskum a skúšky Terénne skúšky Časť 16: Šmyková skúška vo vrte (ISO 22476-16: 2024)</b>	<b>STN EN ISO 22476-16</b>  72 1033
------------	---	---

Geotechnical investigation and testing Field testing

Táto norma obsahuje anglickú verziu európskej normy.  
This standard includes the English version of the European Standard.

Táto norma bola oznámená vo Vestníku ÚNMS SR č. 01/25

Obsahuje: EN ISO 22476-16:2024, ISO 22476-16:2024

**139830**

---

Úrad pre normalizáciu, metrológiu a skúšobníctvo Slovenskej republiky, 2025  
Slovenská technická norma a technická normalizačná informácia je chránená zákonom č. 60/2018 Z. z. o technickej normalizácii  
v znení neskorších predpisov.



EUROPEAN STANDARD

EN ISO 22476-16

NORME EUROPÉENNE

EUROPÄISCHE NORM

November 2024

ICS 93.020

English Version

## Geotechnical investigation and testing - Field testing - Part 16: Borehole shear test (ISO 22476-16:2024)

Reconnaissance et essais géotechniques - Essais en  
place - Partie 16: Essai de cisaillement en forage (ISO  
22476-16:2024)

Geotechnische Erkundung und Untersuchung -  
Felduntersuchungen - Teil 16: Bohrscherversuch mit  
Phikometer (ISO 22476-16:2024)

This European Standard was approved by CEN on 2 January 2024.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

**EN ISO 22476-16:2024 (E)**

<b>Contents</b>	<b>Page</b>
<b>European foreword.....</b>	<b>3</b>

## **European foreword**

This document (EN ISO 22476-16:2024) has been prepared by Technical Committee ISO/TC 182 "Geotechnics" in collaboration with Technical Committee CEN/TC 341 "Geotechnical Investigation and Testing" the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2025, and conflicting national standards shall be withdrawn at the latest by May 2025.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users' national standards body/national committee. A complete listing of these bodies can be found on the CEN website.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.

## **Endorsement notice**

The text of ISO 22476-16:2024 has been approved by CEN as EN ISO 22476-16:2024 without any modification.



# International Standard

**ISO 22476-16**

## Geotechnical investigation and testing — Field testing —

### Part 16: Borehole shear test

*Reconnaissance et essais géotechniques — Essais en place —  
Partie 16: Essai de cisaillement en forage*

**First edition  
2024-10**

**ISO 22476-16:2024(en)****COPYRIGHT PROTECTED DOCUMENT**

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

**ISO 22476-16:2024(en)****Contents**

Page

<b>Foreword</b> .....	<b>v</b>
<b>Introduction</b> .....	<b>vi</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms, definitions and symbols</b> .....	<b>1</b>
3.1 Terms and definitions.....	1
3.2 Symbols.....	3
<b>4 Equipment</b> .....	<b>4</b>
4.1 General.....	4
4.2 Phicometer probe.....	6
4.3 Connection tube line and pulling rods.....	6
4.3.1 Connection tube line.....	6
4.3.2 Pulling rods.....	6
4.4 Equipment at ground surface.....	8
4.4.1 Pulling device.....	8
4.4.2 Pressure-volume control unit (CU).....	8
4.4.3 Regulation system of the traction speed of the probe.....	8
4.5 Means of measurement and control.....	8
4.5.1 Time.....	8
4.5.2 Pressure, volume and pulling force.....	8
4.5.3 Axial displacement.....	9
4.5.4 Display of readings.....	9
4.5.5 Dimensions of the shearing zone of the probe.....	9
<b>5 Test procedure</b> .....	<b>9</b>
5.1 Checks and measurements before insertion of the probe in the ground.....	9
5.2 Borehole drilling phase, probe placing phase and zero setting.....	9
5.3 Minimum spacing between tests.....	10
5.4 Teeth insertion phase.....	12
5.5 Shearing phase.....	14
5.5.1 Loading program – applied hold pressures in the probe.....	14
5.5.2 Successive shearing stages under pressure holds.....	14
5.5.3 End of the test.....	15
<b>6 Back-filling of the phicometer borehole</b> .....	<b>15</b>
<b>7 Safety requirements</b> .....	<b>15</b>
<b>8 Test results</b> .....	<b>16</b>
8.1 General.....	16
8.2 Shearing curve graph — Shear strength parameters $\varphi_i$ and $c_i$ .....	16
8.3 Associated graphs.....	16
8.4 Adjustment and determination of the in situ phicometer angle of friction $\varphi_i$ and the in situ phicometer cohesion $c_i$ .....	16
8.5 Examples of adjustment and determination of the in-situ angle of friction $\varphi_i$ and cohesion $c_i$ .....	17
<b>9 Reporting</b> .....	<b>18</b>
9.1 General.....	18
9.2 Field report.....	18
9.3 Test report.....	21
9.4 Tests log.....	22
<b>Annex A (normative) Characteristics of the phicometer probe</b> .....	<b>23</b>
<b>Annex B (normative) Calibration, checks and corrections</b> .....	<b>24</b>
<b>Annex C (normative) Execution of the PBST borehole</b> .....	<b>28</b>

**ISO 22476-16:2024(en)**

<b>Annex D (normative) Determination of the shear strength parameters</b> .....	<b>30</b>
<b>Annex E (informative) Correlations to estimate <math>p_{IM}</math> from other soil resistance parameters <math>q_c</math> and <math>N</math></b> .....	<b>32</b>
<b>Annex F (normative) Accuracy and uncertainties</b> .....	<b>33</b>
<b>Annex G (informative) Examples of adjustment and determination of the in situ phicometer angle of friction <math>\varphi_i</math> and cohesion <math>c_i</math></b> .....	<b>35</b>
<b>Annex H (informative) Example of installation of the PBST equipment</b> .....	<b>40</b>
<b>Bibliography</b> .....	<b>41</b>

**ISO 22476-16:2024(en)****Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at [www.iso.org/patents](http://www.iso.org/patents). ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 182, *Geotechnics*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 341, *Geotechnical Investigation and Testing*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

A list of all parts in the ISO 22476 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## ISO 22476-16:2024(en)

### Introduction

The determination of the shear strength of soils is of paramount importance in geotechnical investigation and testing of soils. The shear resistance of soils and materials, characterised by the friction angle  $\varphi$  and the cohesion  $c$ , represents an important parameter for the geotechnical engineer while studying the stability of construction works and structures in relation with soils and materials. Usually, this resistance is measured in the laboratory using triaxial tests or direct shear tests carried out on field samples and only if sampling, conservation and preparation make it possible to consider the samples as non remolded and sufficiently representative of the soil in place.

Since the 1960's, various experimental devices have been designed and developed to determine the shear strength directly in situ from tests carried out in boreholes, in different soils at different depths.

The study of the bibliography literature shows that the majority of the existing borehole shear tests are based on the use of probes for applying and maintaining a normal pressure on the walls of the borehole and then to carry out a shear phase by a linear displacement of the probe on the soil against the walls of the borehole. The procedure is then repeated through a multistage increase of the normal pressure to obtain more values relating normal pressure and shear resistance.

The test equipment and apparatuses differ from each other by the geometry and size of the probes and by the shape of the friction part of these probes and by the procedure for applying normal pressure stages and shear phases.

One of the first devices of this kind is the Iowa Borehole Shear Tester (BST) developed in the USA.<sup>[13]</sup> The test is performed by placing a bilateral expandable probe, equipped with two diametrically opposed shear plates in a predrilled borehole, expanding the probe against the wall of the borehole and causing a shear failure in the soil by pulling the probe axially along the borehole. The size of the shear plates is relatively small (32,3 cm<sup>2</sup>) and does not allow testing of soils with coarse elements, which can somewhat limit its field of application.

In the early 1970s, H. Mori,<sup>[15]</sup> in Japan, developed an in situ shearing device called the IST which was used in many projects. The principle of the test is carried out by generating a shearing force while pulling upwards a cylindrical expandable probe provided with teeth driven into the wall of the borehole but it is not reported whether the IST test continues to be performed currently.

A self-boring in situ friction test (SBIFT), also developed in Japan,<sup>[14]</sup> allows the evaluation of soil characteristics as the initial horizontal at rest pressure, and deformation modulus and strength characteristics (cohesion and internal friction angle) of the soil. The SBIFT possesses a self-boring drilling functionality that can reduce the disturbance of the tested soil. However, very few data and results are available to currently validate this device and the characteristics of the soil it provides.


The same way as the SBIFT, a self-boring in situ shear pressuremeter (SBISP), was recently developed in China,<sup>[12]</sup> that allows the evaluation of pressuremetric characteristics as the initial horizontal at rest pressure, deformation yield pressure and modulus and also strength characteristics (cohesion and internal friction angle) of the soil. The SBISP possesses a self-boring drilling functionality that can greatly reduce the disturbance of the tested soil. However, very few data and results are available to currently validate this device and the characteristics of the soil it provides.

This document applies to the borehole shear test using the phicometer procedure, commonly named the phicometer borehole shear test (PBST). This test has been invented and developed by Gérard Philipponnat in the 1980's.<sup>[10]</sup>

This test has been the subject, between 1986 and 1992, of several applied research programs to design the apparatus and its components and to develop and optimize a common test procedure that can be used in a majority of soils. Various articles have been published as a result of these researches and since then PBST tests continue to be carried out currently, for the determination of the shear strength parameters from the test and to derive values for the undrained shear strength and an estimation of the drained effective shear resistance parameters.<sup>[9]</sup> The test has been standardized in France since 1997.

## ISO 22476-16:2024(en)

The borehole shear test using the picometer covers a four-phases procedure consisting of drilling a borehole, lowering the probe to the test depth, inflating it into the borehole wall and shearing the soil by applying a series of steps of controlled radial pressure and simultaneously pulling out the probe with a constant displacement rate. The test sequences are shown in [Figure 1](#).

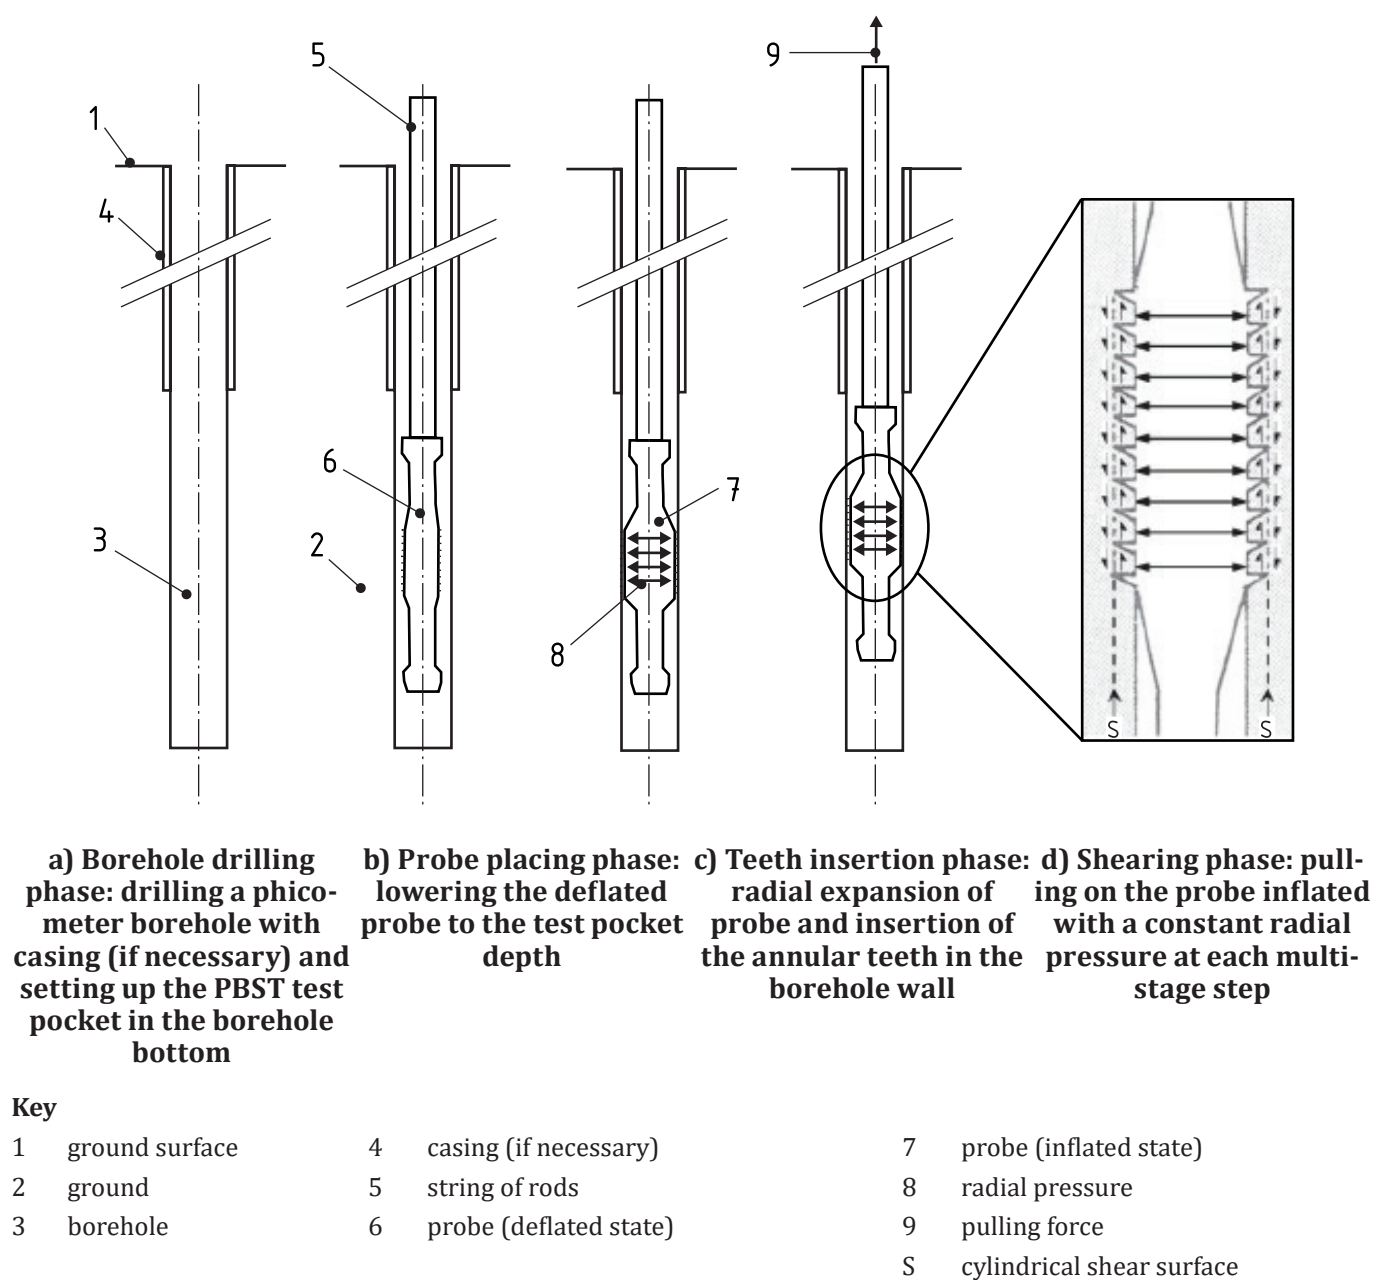

**Figure 1 — General arrangement and phases of the picometer procedure borehole shear test**



# Geotechnical investigation and testing — Field testing —

## Part 16: Borehole shear test

### 1 Scope

This document is applicable to the borehole shear test using the phicometer procedure, commonly named the phicometer test (etymologically derived from phi for friction angle, co for cohesion and meter for measurement).

The test can be performed in all types of natural soils, fills and artificial soils, which can be saturated or not.

It does not apply to very soft fine soils, very loose coarse soils, medium strong to very strong rocks and natural or artificial soils with a predominance of cobbles having a particle diameter greater than 150 mm.

Generally, the test is applicable in soils with an order of magnitude of their in situ resistance characteristics as follows:

- Ménard pressuremeter limit pressure:  $0,4 \text{ MPa} < p_{IM} < 3,5 \text{ MPa}$  approximately or more than 4 MPa in granular non-cohesive soils;
- CPT Cone resistance:  $1,5 \text{ MPa} < q_c < 15 \text{ MPa}$  approximately, depending on the type of soil (see [Annex E](#));
- SPT N:  $8 < N < 50$  approximately, depending on the type of soil (see [Annex E](#)).

The test can also be carried out in soils presenting a resistance outside these application limits as long as the representativeness of the results is assessed or validated by the analysis of the PBST graphs (see [Clause 8](#)).

This document applies only to tests carried out at a depth less than or equal to 30 m.

The parameters derived from this test are the shear strength properties, as the cohesion and angle of friction.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 10012, *Measurement management systems — Requirements for measurement processes and measuring equipment*

ISO 22475-1, *Geotechnical investigation and testing — Sampling methods and groundwater measurements — Part 1: Technical principles for the sampling of soil, rock and groundwater*

**koniec náhľadu – text ďalej pokračuje v platenej verzii STN**