

STN P	Svetelné aplikácie Adaptívne systémy núdzového únikového osvetlenia	STN P CEN/TS 17951 36 0079
------------------	--	--

Lighting Applications - Adaptive Emergency Escape Lighting Systems

Táto norma obsahuje anglickú verziu európskej normy.
This standard includes the English version of the European Standard.

Táto norma bola oznámená vo Vestníku ÚNMS SR č. 12/25

Táto predbežná slovenská technická norma je určená na overenie. Prípadné pripomienky pošlite do júna 2026 Úradu pre normalizáciu, metrológiu a skúšobníctvo Slovenskej republiky.

Obsahuje: CEN/TS 17951:2024

141705



Úrad pre normalizáciu, metrológiu a skúšobníctvo Slovenskej republiky, 2026
Slovenská technická norma a technická normalizačná informácia je chránená zákonom č. 60/2018 Z. z. o technickej normalizácii v znení neskorších predpisov.

TECHNICAL SPECIFICATION

CEN/TS 17951

SPÉCIFICATION TECHNIQUE

TECHNISCHE SPEZIFIKATION

June 2024

ICS 01.080.10; 91.160.10

English Version

Lighting Applications - Adaptive Emergency Escape Lighting Systems

Éclairagisme - Systèmes d'éclairage de sécurité
adaptatifsAngewandte Lichttechnik - Adaptive
Sicherheitsbeleuchtungsanlagen

This Technical Specification (CEN/TS) was approved by CEN on 8 January 2024 for provisional application.

The period of validity of this CEN/TS is limited initially to three years. After two years the members of CEN will be requested to submit their comments, particularly on the question whether the CEN/TS can be converted into a European Standard.

CEN members are required to announce the existence of this CEN/TS in the same way as for an EN and to make the CEN/TS available promptly at national level in an appropriate form. It is permissible to keep conflicting national standards in force (in parallel to the CEN/TS) until the final decision about the possible conversion of the CEN/TS into an EN is reached.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and United Kingdom.

EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG**CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels**

CEN/TS 17951:2024 (E)

Contents	Page
European foreword	3
Introduction	4
1 Scope	6
2 Normative references	6
3 Terms and definitions	6
4 Operation of adaptive emergency lighting system	10
4.1 Parameters to be controlled	10
4.2 Sign comprehensibility and conspicuity	12
4.3 Emergency Escape route signage	13
4.3.1 General.....	13
4.3.2 Sign design and signage system	13
4.3.3 Sign behaviour	14
4.4 Emergency escape lighting - Change in illumination	15
4.4.1 Escape route lighting	15
4.4.2 Open area lighting	15
4.4.3 Local area lighting	15
4.4.4 High-risk task area lighting.....	15
4.5 Operating Conditions	16
5 AEELS execution stages	16
5.1 General.....	16
5.2 Design.....	17
5.3 Installation	17
5.4 Commissioning	17
5.5 Initial verification.....	17
5.6 Operation.....	17
5.7 Maintenance	18
5.7.1 General.....	18
5.7.2 Monthly verification	18
5.7.3 Annual verification.....	18
Annex A (informative) Example of project execution stages of an Adaptive Emergency Escape Lighting System	19
Annex B (informative) Example of formats for closed escape route	20
Bibliography	21

European foreword

This document (CEN/TS 17951:2024) has been prepared by Technical Committee CEN/TC 169, “Light and Lighting”.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users’ national standards body. A complete listing of these bodies can be found on the CEN website.

According to the CEN/CENELEC Internal Regulations, the national standards organisations of the following countries are bound to announce this Technical Specification: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.

CEN/TS 17951:2024 (E)**Introduction**

Emergency lighting is provided for use when the power supply to the normal lighting fails and is therefore powered from a source independent of that supplying the normal lighting. Whilst the supply to the normal lighting is present, emergency lighting can operate in non-maintained or in maintained mode.

In particular, the objective of escape route lighting is to assist the safe exit from a location for occupants by providing appropriate visual conditions and direction finding on escape routes by means of a combination of luminaires and signs designed to meet predetermined conditions.

Adaptive Emergency Escape Lighting Systems (AEELS) can be used to revise the escape routing and increase the conspicuity of emergency signage depending upon the location of a particular hazard, by using directional exit signs that can be controlled to change routing information and to direct occupants away from an exit route that has become unusable.

Adaptive Emergency Escape Lighting Systems can operate in two ways, where signage is changed at the start of the evacuation procedure only, or alternatively where the information displayed by the signs can be changed during the evacuation as circumstances dictate. In this second mode, during an evolving incident, escape routing can be revised using AEELS by using directional exit signs that can be controlled to change routing information directing occupants away from an exit route that has become unusable.

To improve the conspicuity of emergency signage AEELS could, for example, introduce a time-varying component to the sign such as a flashing or sequentially activated directional arrow.

In case of failure of the AEELS control unit making it impossible to provide control signals to the Emergency Lighting System (ELS), luminaires of the ELS would remain in the last known condition or revert to the original condition in accordance with the EN 1838 design requirements depending on risk assessment. It is essential, that in all cases the consistency between all escape signage is preserved.

For the purposes of this technical specification, Adaptive Emergency Escape Lighting Systems are regarded as a generic term of which there are a number of specific forms, depending upon the configuration and available system inputs as shown in Figure 1.

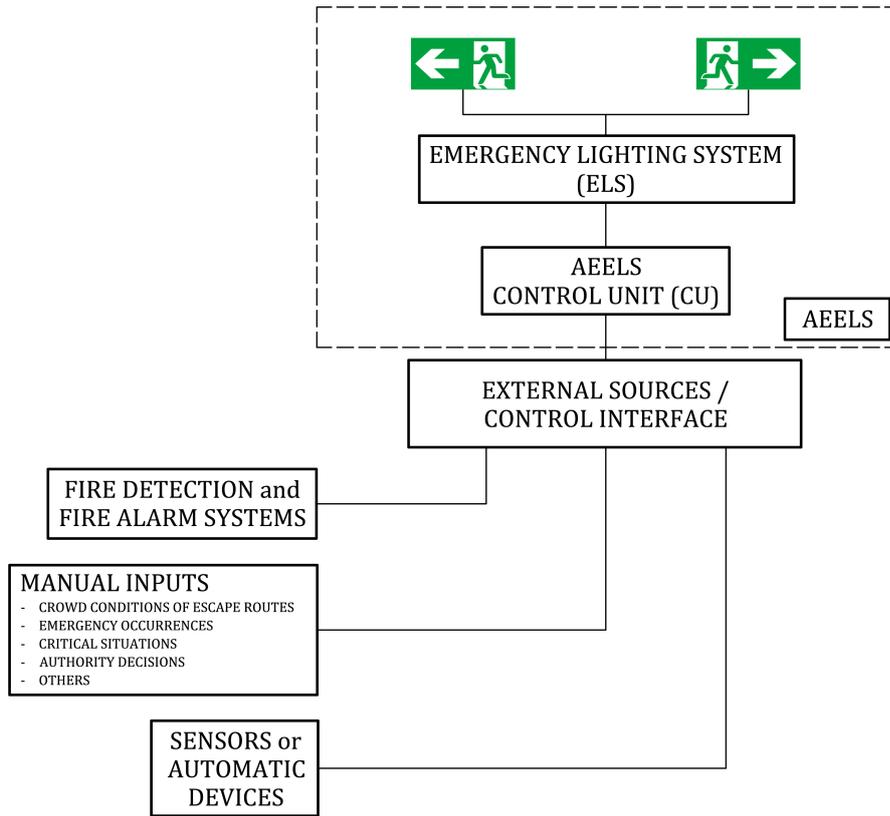


Figure 1 — Example of AEELS configuration

CEN/TS 17951:2024 (E)**1 Scope**

This document specifies the lighting and operating requirements for the application of adaptive emergency escape lighting systems that can interact with management and control systems or be provided with functionality to modify the operation of emergency escape lighting according to situational requirements, in terms of luminous flux output, escape directions and the characteristics and meaning of emergency escape lighting.

The situational requirements can require the involvement and interaction with components and systems other than emergency escape lighting systems. Requirements for these components or systems are not part of this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1838, *Lighting applications - Emergency lighting for buildings*

EN 50172, *Emergency escape lighting systems*

EN 60598-2-22, *Luminaires - Part 2-22: Particular requirements - Luminaires for emergency lighting*

EN 62034, *Automatic test systems for battery powered emergency escape lighting*

EN ISO 7010, *Graphical symbols - Safety colours and safety signs - Registered safety signs (ISO 7010)*

koniec náhľadu – text ďalej pokračuje v platenej verzii STN