

STN	Nízkonapäťové spínacie a riadiace zariadenia Časť 4-1: Stýkače a spúšťáče motorov Elektromechanické stýkače a spúšťáče motorov Oprava AC	STN EN IEC 60947-4-1/AC 35 4101
------------	---	---

Low-voltage switchgear and controlgear - Part 4-1: Contactors and motor-starters - Electromechanical contactors and motor-starters

Táto norma obsahuje anglickú verziu európskej normy.
This standard includes the English version of the European Standard.

Táto norma bola oznámená vo Vestníku ÚNMS SR č. 06/26

Obsahuje: EN IEC 60947-4-1:2025/AC:2026, IEC 60947-4-1:2023/COR1:2026

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

**EN IEC 60947-4-
1:2025/AC:2026-04**

April 2026

ICS 29.120.99; 29.130.20

English Version

**Low-voltage switchgear and controlgear - Part 4-1: Contactors
and motor-starters - Electromechanical contactors and motor-
starters
(IEC 60947-4-1:2023/COR1:2026)**

Appareillage à basse tension - Partie 4-1: Contacteurs et
démarreurs de moteurs - Contacteurs et démarreurs
électromécaniques
(IEC 60947-4-1:2023/COR1:2026)

Niederspannungsschaltgeräte - Teil 4-1: Schütze und
Motorstarter - Elektromechanische Schütze und
Motorstarter
(IEC 60947-4-1:2023/COR1:2026)

This corrigendum becomes effective on 3 April 2026 for incorporation in the English language version of the EN.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Endorsement notice

The text of the corrigendum IEC 60947-4-1:2023/COR1:2026 was approved by CENELEC as EN IEC 60947-4-1:2025/AC:2026-04 without any modification.

IEC 60947-4-1:2023/COR1:2026 © IEC 2026

INTERNATIONAL ELECTROTECHNICAL COMMISSION
COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

IEC 60947-4-1
Edition 5.0 2023-11

**Low-voltage switchgear and controlgear -
Part 4-1: Contactors and motor-starters -
Electromechanical contactors and motor-
starters**

IEC 60947-4-1
Édition 5.0 2023-11

**Appareillage à basse tension -
Partie 4-1: Contacteurs et démarreurs de
moteurs - Contacteurs et démarreurs
électromécaniques**

CORRIGENDUM 1

Corrections to the French version appear after the English text.

Les corrections à la version française sont données après le texte anglais.

Table 7 – Making and breaking capacities – Making and breaking conditions according to utilization category

This correction applies to the French version only.

Table 10 – Conventional operational performance – Making and breaking conditions according to utilization category

This correction applies to the French version only.

9.3.3.2.1.2.3 Pickup power for direct current-controlled electromagnet with separate pick-up and hold-on windings or alternating current controlled conventional electromagnet

Replace in the second paragraph, "have been held" with "is maintained".

9.3.3.2.1.2.4 Pick-up power for electronically controlled electromagnet


Replace, in the second paragraph, "has been held" with "is maintained".

Replace, in the third paragraph, "shall be measured" with "is monitored" and replace "maximum power and has reached" with "maximum power. The current $I_{(i)}$ shall be measured when it has reached".

IEC 60947-4-1:2023/COR1:2026 © IEC 2026

Figure 6 – Peak current envelope*Replace Figure 6 with the following new Figure 6:*

Peaks duration range (ms)	Maximum peak ratio
From 0 to and including 0,1	7
Greater than 0,1 to and including 1	4
Greater than 1 to and including 5	2
Greater than 5	1,5

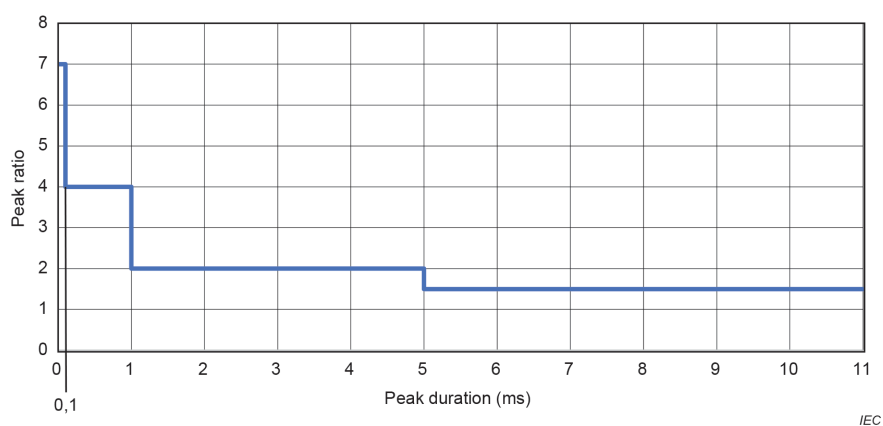

IEC

